



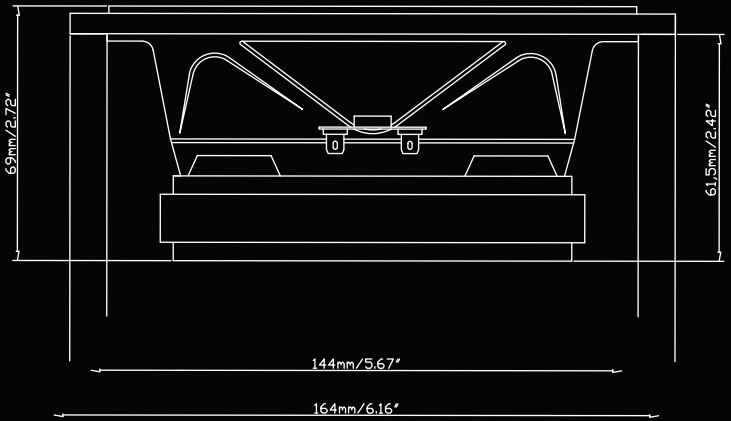

WDX6MOTO

350 WATT 6.5" 2-WAY LOUDSPEAKERS

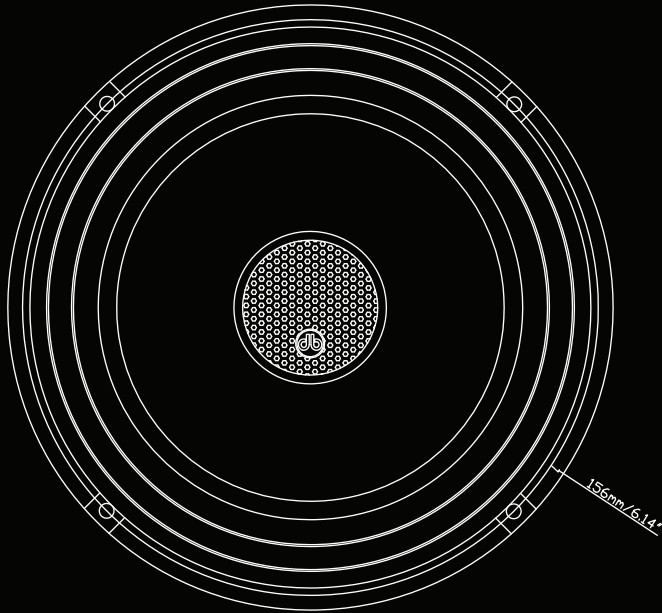

SPECIFICATION

- **Power Handling** : 150 Watts
- **Dynamic Wattage** : 350 Watts
- **Music Program** : 50 Watts - 150 Watts
- **Frequency Response** : 80Hz - 21KHz
- **Impedance** : 4 Ω
- **Sensitivity** : 103.5dB

DIMENSIONS

- **Mounting Depth** : 2.56" / 65mm
- **Cutout Diameter** : 5.63" / 143mm

FEATURES

- 6.5" Weather Resistant Coaxial
- High Efficiency Loudspeaker
- Ultra Light weight Treated Cone
- High Reaction Ribbed Treated Surround
- 1" (25mm) High Temperature Voice Coil
- Die-cast Aluminum Anti-Resonance Basket
- 1.25" (28mm) Aluminum Dome Tweeter
- Protective Grills Included

ESPECIFICACIONES

- **Potencia** : 150 Watts
- **Potencia Dinámica** : 350 Watts
- **Rango de Potencia** : 50 Watts - 150 Watts
- **Rango de Frecuencia** : 80Hz - 21KHz
- **Impedancia** : 4 Ω
- **Sensibilidad** : 103.5dB

DIMENSIONES

- **Profundidad** : 2.56" / 65mm
- **Abertura** : 5.63" / 143mm

CARACTERÍSTICAS

- Bocina Coaxial de 6.5"(165mm)
- Bocina de Alta Eficiencia
- Cono ultra ligero con resistencia a los elementos
- Suspencion de cono acanalado
- Bobina de alta temperatura de 1" (25mm)
- Canasta de aluminio antiresonante
- Tweeter de Aluminio de 1.25" (28mm)
- Parrillas Incluidas