

## 4-OUTPUT HDTV/CATV DISTRIBUTION AMPLIFIER

- Four Output Ports – Split your antenna's signal to 4 TVs.
- Boost signal strength for TV reception throughout the home.
- Compatible with HDTV, CATV, analog, and digital distribution applications.
- Precision machine sealed housing provides protection against dust ingress and water splashes.
- Excellent surge protection on all ports.
- Zinc die cast housing provides shielding from electrostatic discharge.
- Compact size for indoor use. Can be used outdoors under an eave.
- Supports ATSC 3.0, NextGen TV, and UHD 4K broadcast signals.




### Split TV Signal to 4 TVs

Distributing one antenna's signal to multiple TVs and long coaxial cables (50 ft. or more) between your antenna and your TV (or converter box) will result in a certain amount of signal loss. Distribution amplifiers counter this loss by increasing the overall signal strength so the coaxial cable coming from the antenna provides consistent TV reception throughout your installation. Made using professional grade, high-performance materials, the 4-Output Distribution Amplifier can be used in both home and business installations where as many as four TVs need reception from one antenna.

### Everything You Need, All From One Place

Complete your antenna setup without sacrificing quality, choice, or convenience. As perfectionists and antenna enthusiasts, innovation and quality are two of our highest priorities. This is why we make sure you have everything you need to get the most out of cutting the cord and what makes us cord-cutters' favorite brand.

### Whole-Home Ready

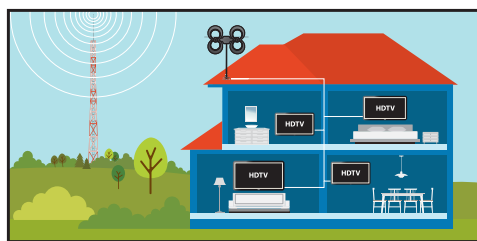


Bring Free TV to All Your Screens. Homes already wired for satellite or cable service have the coaxial cable needed to send your antenna's signal to multiple screens, all you have to do is connect your ClearStream antenna and you've got FREE TV throughout the house!



Back View

### SPECIFICATIONS:

	<b>MODEL NUMBER</b> DAX4
	<b>FORWARD FREQUENCY RANGE</b> 54 - 1000 MHz
	<b>RETURN PATH FREQUENCY RANGE</b> 5 - 42 MHz
	<b>GAIN</b> 8 dB per port
	<b>NOISE FIGURE</b> Typically less than 3 dB
	<b>ISOLATION</b> 20 dB typical
	<b>MAX OUTPUT LEVEL (Rated output level)</b> 17 dBmV @Rated input
	<b>MAX INPUT LEVEL (Rated input level)</b> 10 dBmV 77 channels
	<b>PASSIVE RETURN</b> 8 dB typical insertion loss
	<b>OPERATING TEMPERATURE</b> -40 °C to +60 °C
	<b>CONNECTOR</b> 75-ohm F-Type
	<b>POWER SUPPLY OUTPUT</b> 12v DC, 300 mA
	<b>ASSEMBLED DIMENSIONS</b> 3.5"H x 3.8"W x 1.0"D
	<b>ASSEMBLED WEIGHT</b> 8.8 ounces
	<b>COLOR</b> Silver
	<b>REGULATORY COMPLIANCE</b> FCC-15B
	<b>WARRANTY</b> 90-days

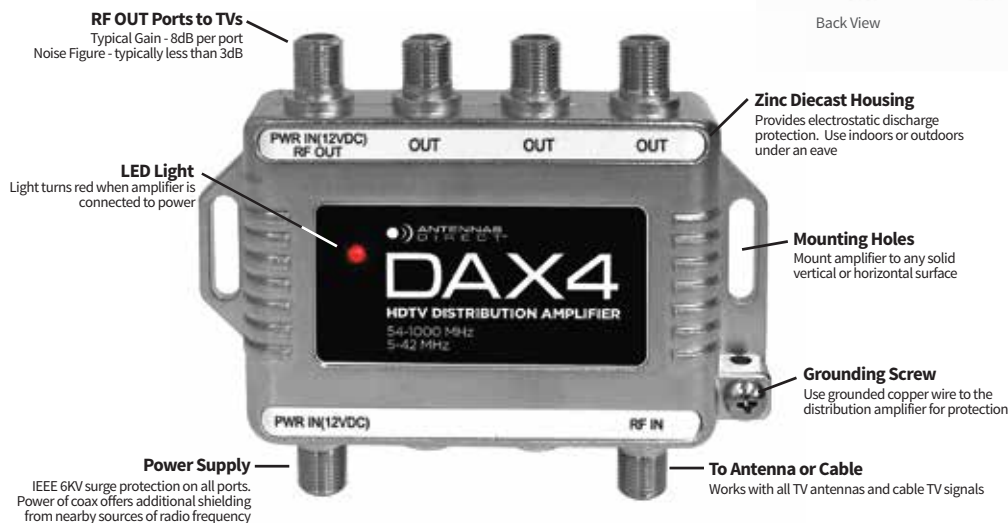

The 4-Port Distribution Amplifier comes with:

- 4-Output HDTV Distribution Amplifier
- Power Supply (for indoor use only)
- 40 in. Coaxial Cable
- 2 Wall Screws
- 1 Grounding Screw
- Assembly and Installation Instructions



[antennasdirect.com](http://antennasdirect.com) 1-877-825-5572 U.S.A.  
 16388 Westwoods Business Park  
 Ellisville, Missouri 63021  
 Copyright ©2022 Antennas Direct™, Inc. All Rights Reserved.  
 Please visit [www.antennasdirect.com/patents](http://www.antennasdirect.com/patents) for all patent information.