


L4248 Series – 2K NVR & Wire-Free Camera system : Installation

What is included in the box?

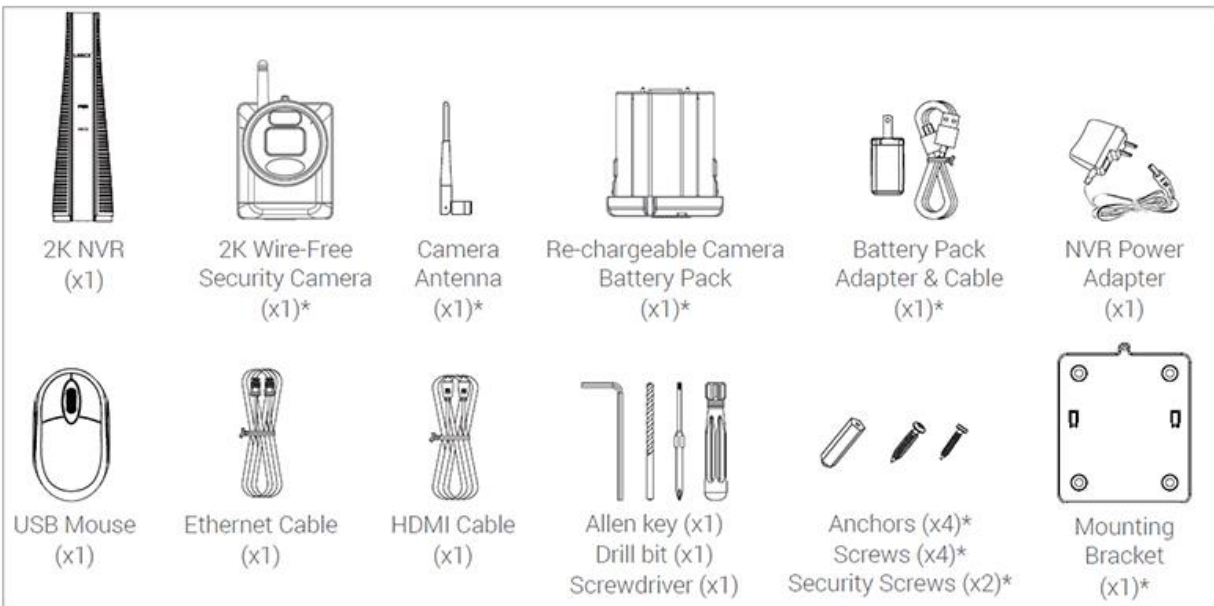

*Dependent on the number of cameras included.


Before you start

The camera battery comes partially charged (due to safety regulations). Please, fully charge the battery before use and setup. You can charge the battery pack inside or outside of the camera.

ⓘ The camera battery comes partially charged (due to safety regulations). Please, fully charge the battery before use and setup to take full advantage of the Wire-Free camera. You can charge the battery pack inside or outside of the camera.

To charge the camera battery pack:

1. Remove the protective film on the battery contacts and camera lens.

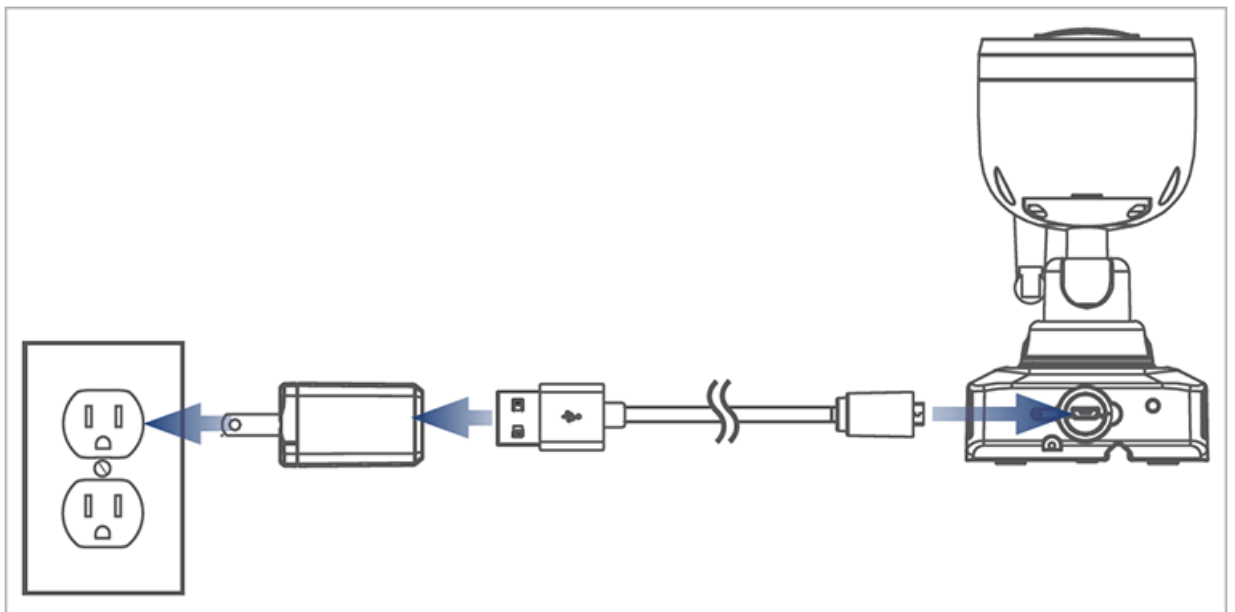

2. Using the provided battery charging adapter and cable, connect the camera to a nearby outlet.

Camera Battery Charging Indicator


 (solid)	Fully charged
 (solid)	Charging

Battery Charging Time

- 2-cell : 2-4 hours
- 3-cell : 3-5 hours

Setup 2K NVR


1. Connect the included NVR power adapter to the recorder.

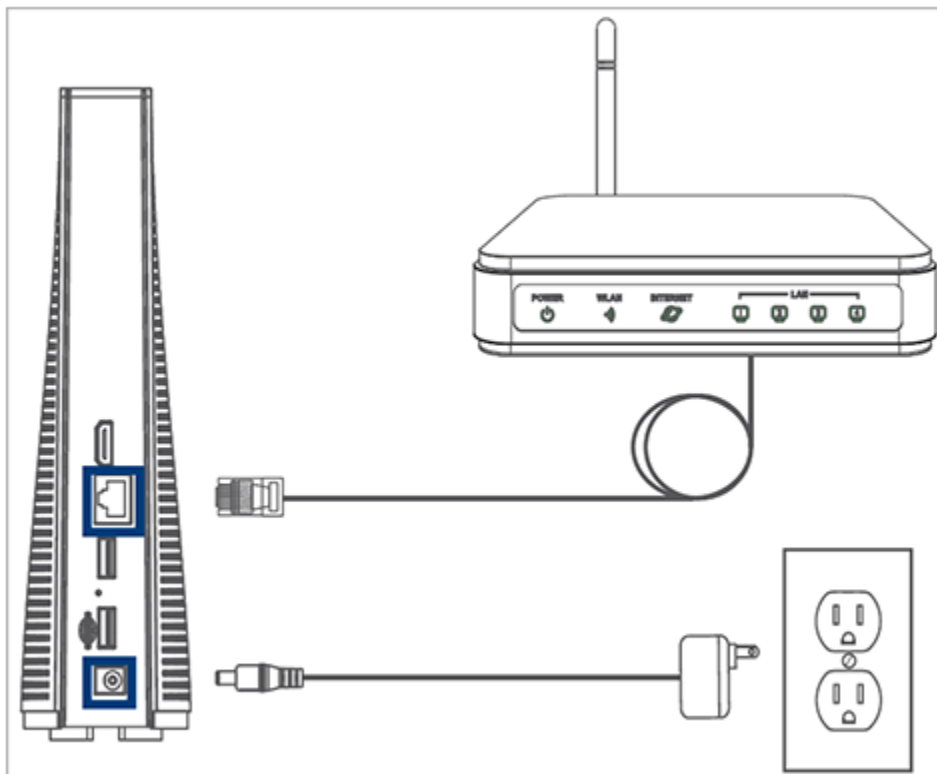

2. Connect the recorder to your router using the included Ethernet cable.

Optional: Full Recorder Setup


1. Connect a monitor using the included HDMI cable.

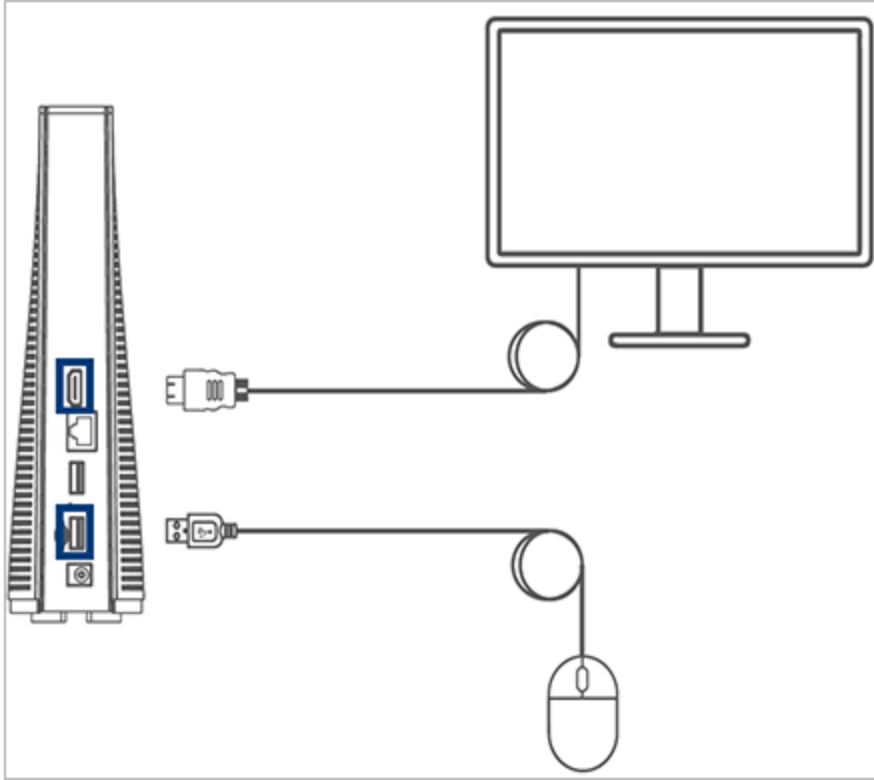

2. Connect the included USB mouse to one of the USB ports.


Setup 2K Wire-Free Camera

1. Turn the adjustment ring counterclockwise to loosen and angle the

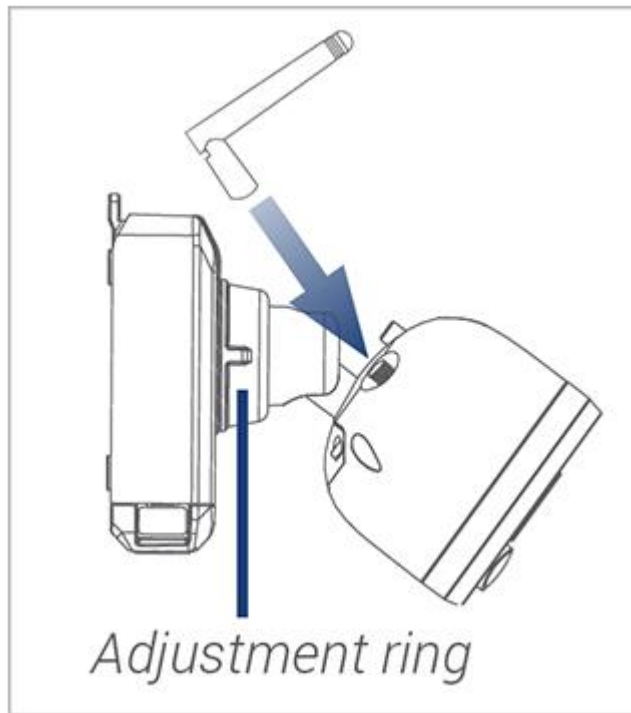

camera.

2. Screw in the antenna.
3. Insert the battery pack into the bottom of the camera.

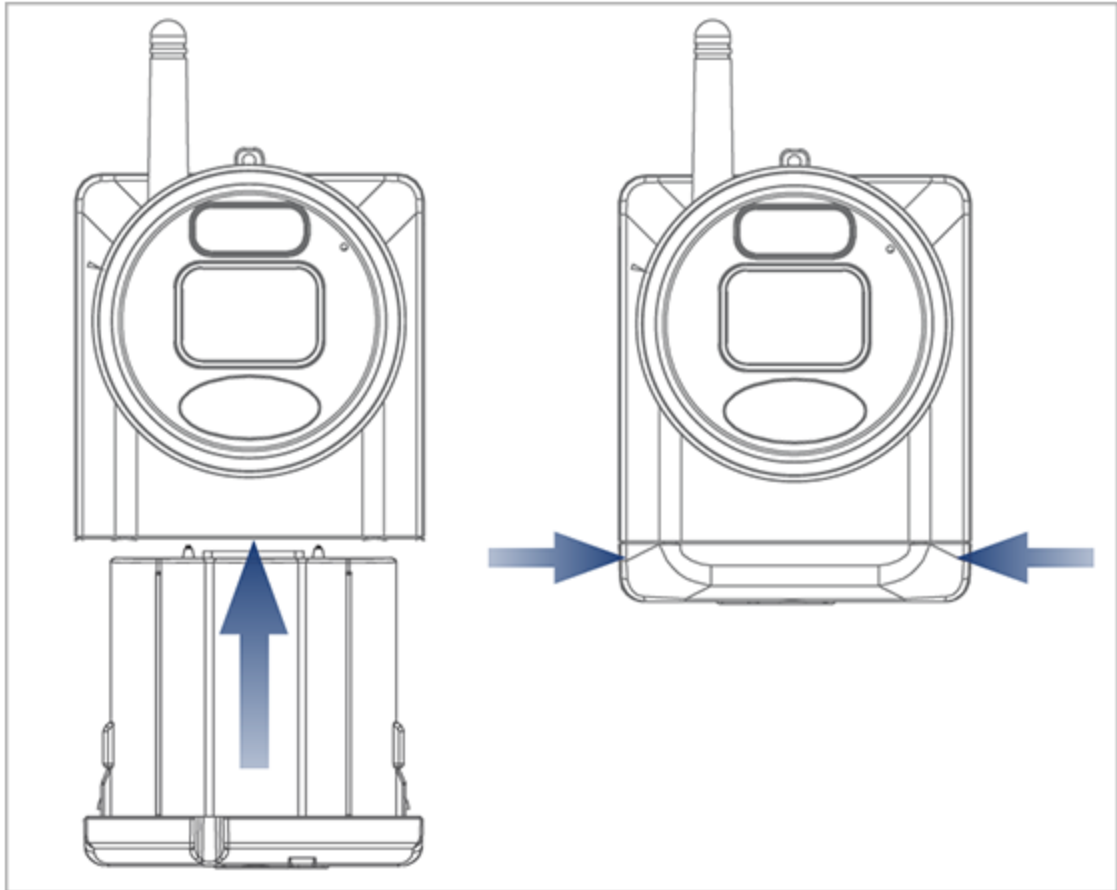

Note: You will hear a 'beep' when the power pack is properly inserted. If you do not hear this alert, remove the power pack by pushing in on the battery release tabs, then re-insert.

Setup recorder with Lorex Cirrus App


You can connect your recorder to the Lorex Cirrus app for remote access.


To setup NVR with Lorex Cirrus App


1. Download the Lorex Cirrus app by scanning the QR code on your mobile device.

You can also visit [Google Play](#) or [Apple Store](#) to download the Lorex Cirrus app.



2. Open the Lorex Cirrus app.
3. Tap  to open the menu, then tap **Devices**.

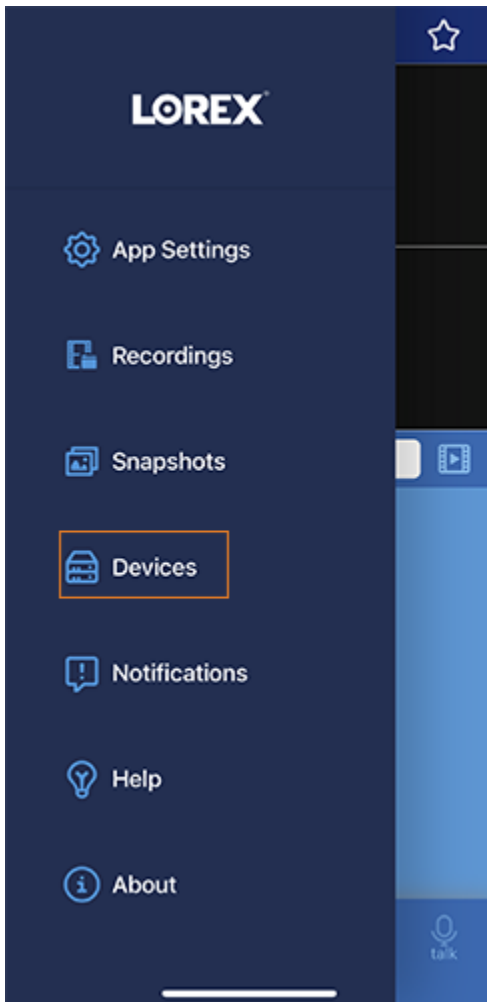

4. Tap  icon on the **Device Manager** screen to add device.
5. Scan the QR code on your Lorex recorder using the camera on your phone. The QR code may be located on the side or top panel of your recorder.

Note: If you're having trouble scanning the QR code or if your mobile device does not have a camera, tap **Manually Enter Device ID**. The Device ID is printed below the QR code.

6. By default the device information reads as the following. Refer to the product information to make sure the information is correct.

- **IP Address/ID:** Device ID
- **Username:** admin

← Edit Information

IP Address/ID
LWFPJ933AY2U

Media Port

User Name
admin

Password

Save

7. Enter the following information:

- **Media Port:** 3500
- **Password:** 00000000

Note: This password is temporary. Remember to update your password in the following screen.

8. Tap **Save**.
9. A pop-up will display prompting you to change your password, tap **OK**.
10. Enter a new device password in the **Password Update** screen. **Note:** The password must contain 8-15 characters.

The image shows a mobile application screen titled "Password Update". The screen has a dark blue header with the title in white. Below the header, there are two white input fields on a blue background. The first field is labeled "New Password" and the second is labeled "Confirm Password". Both fields have a small eye icon on the right side, indicating a toggle for password visibility. The fields are currently empty.

11. Re-enter your device password.
12. Tap **Save**.
13. *(Optional)* If you have already completed the initial setup, enter the system's password, then tap **Save**. The app will display the system's Live View.

Note: Up to 3 authorized users can remotely access the recorder at the same time using the Lorex Cirrus app.