


USER MANUAL

TITLE: GUITAR AMPLIFIER

MODEL: PVAMP20

www.pyleaudio.com

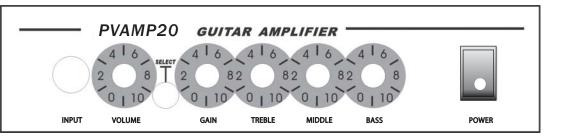

Functions

1. INPUT

This is an instrument input for plugging in virtually angthing.

2.VOLUME

This is the overall level control for the normal channel or overdirve channel.

3.OVERDRIVE

This switch is select the drive channel or normal channel.

4.GAIN

This is the distortion intensity control for the overdrive channel.

5. TREBLE

This equalization control adjusts the amount of boost in the high frequency range

6. MIDDLE

This equalization control adjusts the amount of boost in the middle frequency range.

7. BASS

This equalization control adjusts the amount of boost in the low frequency range

8.POWER

This on/off switch provides power the unit

9.HEADPHONE

This is a 1/4"3-conductor stereo headphone jack for plugging in headphones



FUSE 0.5A 230V



AVIS: RISOUE CHOC ELECTRIQUE NE PAS OUVRIR





TECHNICAL SPECIFICATIONS Power ~110 AC, 60 Hz **Rated Power** 20 Watts MAX Load Impedance 4 Ohms 6" Speaker Signal/Noise Ratio ≥ 70dB 20HZ to 15KHZ Frequency Response Dimension 10" x 6.1" x 11.4" Weight 7.7 lbs

CAUTION: CHASSIS SURFACE HOT.

WARNING: TO REDUCE THE RISK OF FIRE OR

ELECTRIC SHOCK, DO NOT EXPOSE

THIS EQUIPMENT TO RAIN OR MOISTURE.

AVIS: RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR.

ATTENTION: SUPERFICIE DE CHASSIS CHAUDE.