


Supurr-Flex® Multi-Layered Flexible Aluminum Duct




Plastic clamps
(included with FC0405B & FC0408B)



Metal spring clamps
(included with F0405MSX/30 & F0408MSX/30)

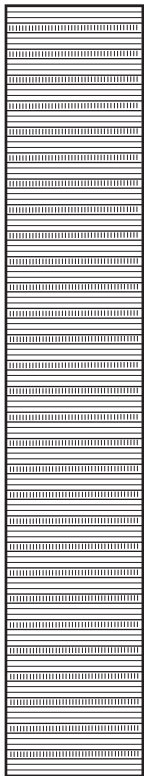


**LENGTH
B**



**DIA.
A**

Pressure Loss Diagram

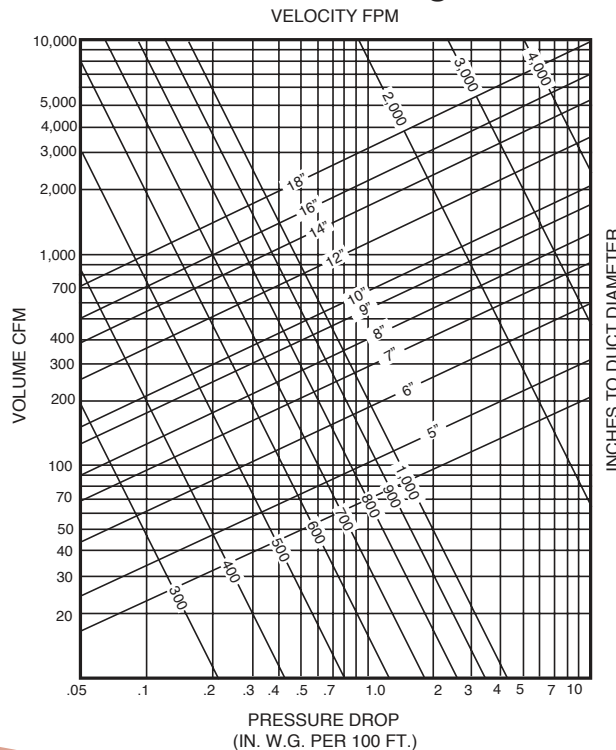

MODEL NO.	DIMENSIONS A x B	DESCRIPTION
F0405B	4" x 5'	
F0408B	4" x 8'	
FC0405B	4" x 5'	w/ Plastic Clamps
FC0408B	4" x 8'	w/ Plastic Clamps
F0405MSX/30	4" x 5'	w/ Metal Spring Clamps
F0408MSX/30	4" x 8'	w/ Metal Spring Clamps

GENERAL INFORMATION

**RECOMMENDED DUCT BY DRYER
MANUFACTURERS FOR DRYER VENTING**

- 4 in. diameter and lengths of 5 ft. and 8 ft.
- UL Listed on this product is for installations of 8 ft. or less
- Best for clothes dryer duct, fresh air intake and non-insulated ventilation duct
- Fire resistant

PERFORMANCE DATA

For uninsulated aluminum, multi-layered flexible metallic duct

Maximum Velocity

- 5000 FPM / 25 m/sec

Maximum Rated Pressures

- All diameters 10" W.C./2.5Kpa Pos.
- 3"-6" dia.
- 0.5" W.C./0.12 Kpa Neg.

Operating Temperature Range

- 0°F to 265°F intermittent

"F0"

- UL Listed Clothes Dryer Transition Duct
- UL standard No.: 2158A