

Supurr-Flex[®] pure aluminum, multi-layered flexible metallic duct - UL Listed, Clothes Dryer Transition Duct



Fo Duct
Supurr-Flex[®] Clothes Dryer Transition Duct

Model No.	Description
Fo405B	Supurr-Flex [®] multi-layered flexible duct
Fo408B	Supurr-Flex [®] multi-layered flexible duct
FCo405B	Supurr-Flex [®] multi-layered flexible duct
FCo408B	Supurr-Flex [®] multi-layered flexible duct

Performance Data

for uninsulated aluminum, multi-layered flexible metallic duct

Maximum Velocity

- 5000 FPM / 25m/sec

Maximum Rated Pressures

- all diameters 10" W.C/ 2.5Kpa Pos.
- 3"-6" dia., .5" W.C/.12 Kpa Neg.

Operating Temperature Range



- 0 F to 265 F/-18C to 130C Intermittent "Fo"

- UL Listed Clothes Dryer Transition Duct Listing No.: 2158A

General Information

- available in 4" (101mm) dia and lengths of 5' (1.5m) and 8' (2.4m)
- UL Listed on this product is for installations of 8 ft. (2.4m) or less
- **best for** clothes dryer duct, fresh air intake and non-insulated ventilation duct
- fire resistant

Pressure Loss Diagram

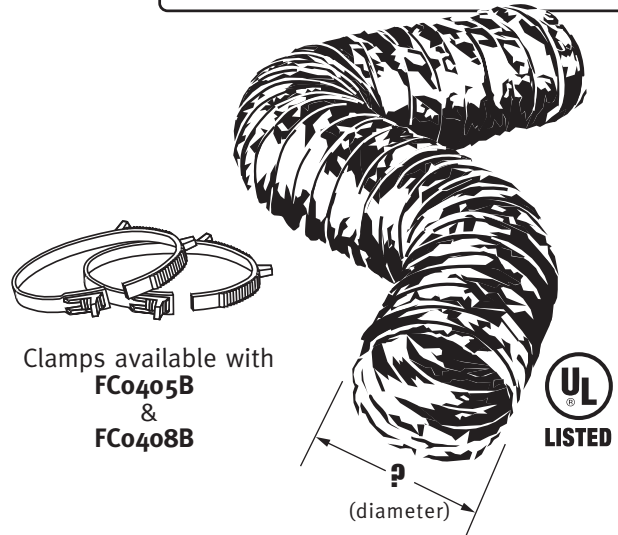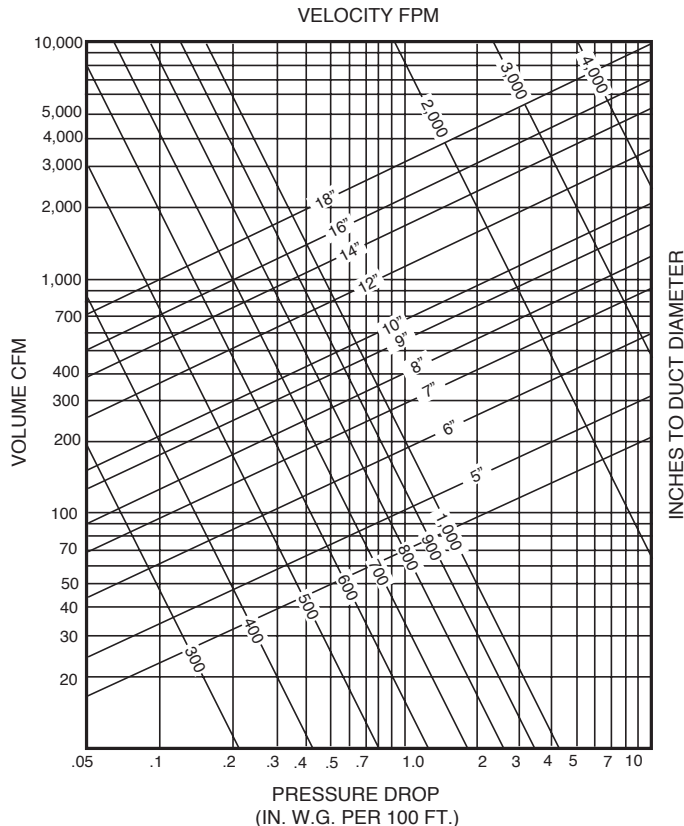

Clamps available with
FCo405B
&
FCo408B



Model No.	A	length	notes
Fo405B	4" dia.	5 ft.	
Fo408B	4" dia.	8 ft.	
FCo405B	4" dia.	5 ft. 1.5m	with plastic clamps
FCo408B	4" dia.	8 ft. 2.4m	with plastic clamps