


## Extra Flexible Speaker Cable With Tinned OFC conductor

Part No.	Jacket color	Length	Gauge	Strands(Construction)	O.D.
V10SW12125-BK	Matte black	125ft.	12 Ga.	98*3*0.12mm*2	5.0mm*2
V10SW12125-WB	Matte white/black	125ft.	12 Ga.	98*3*0.12mm*2	5.0mm*2
V10SW16250-BK	Matte black	250ft.	16 Ga.	37*3*0.12mm*2	3.5mm*2
V10SW16250-WB	Matte white/black	250ft.	16 Ga.	37*3*0.12mm*2	3.5mm*2
V10SW16500-BK	Matte black	500ft.	16 Ga.	37*3*0.12mm*2	3.5mm*2
V10SW16500-WB	Matte white/black	500ft.	16 Ga.	37*3*0.12mm*2	3.5mm*2

### Ultra Flexible Matte Jacket

### Multi-bundles Twist Construction

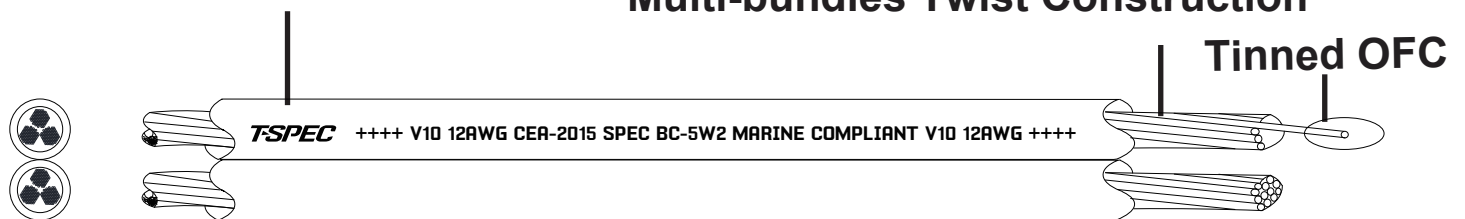

### Specification:

V10 Series speaker wire is built for Ultimate sound quality in wet environments.

The cables is made with Tinned Oxygen Free Copper (Tinned OFC) for excellent signal transfer and sonic accuracy;

With twisted pair configuration to reject system and engine noise. The Jacket with positive print wheel mark for easy installation.

### Insulation:

This product offers a polyvinyl chloride compound and is moisture, abrasion, acid, diesel fuel and oil resistant.

It is extremely flexible and easy to work with.

The ambient Temperature:-40 °C to +75 °C