


Assembly & Installation Instructions

MODEL: DTV2BUHF UHF Television Antenna For Digital & Analog Reception

1. Join the two booms using the boom spacer tubes (A), bolts and nuts.
2. Install the balun (B) as shown including the weather cover. (BALUN INCLUDED)
3. Attach the antenna to the mast (C) using the U-bolt & Bracket (D) as shown. (MAST NOT INCLUDED)
4. Connect to reception equipment using RG-6 coaxial cable(E) for minimum signal loss. (CABLE NOT INCLUDED)
5. **CAUTION:** Installation of this product near power lines is dangerous. This antenna must be installed well clear of any overhead power lines, failure to do so could lead to severe injury or even death.

Specifications (typical):

UHF Channel	14	32	50	69
Gain	6	8	9	10 dBd
3dB Beamwidth	70	60	52	46 degrees
VHF Hi-band Gain:	Avg. -8dBd			
Impedance:	75 ohms (F connector)			
VSWR:	Avg. 1.7:1			

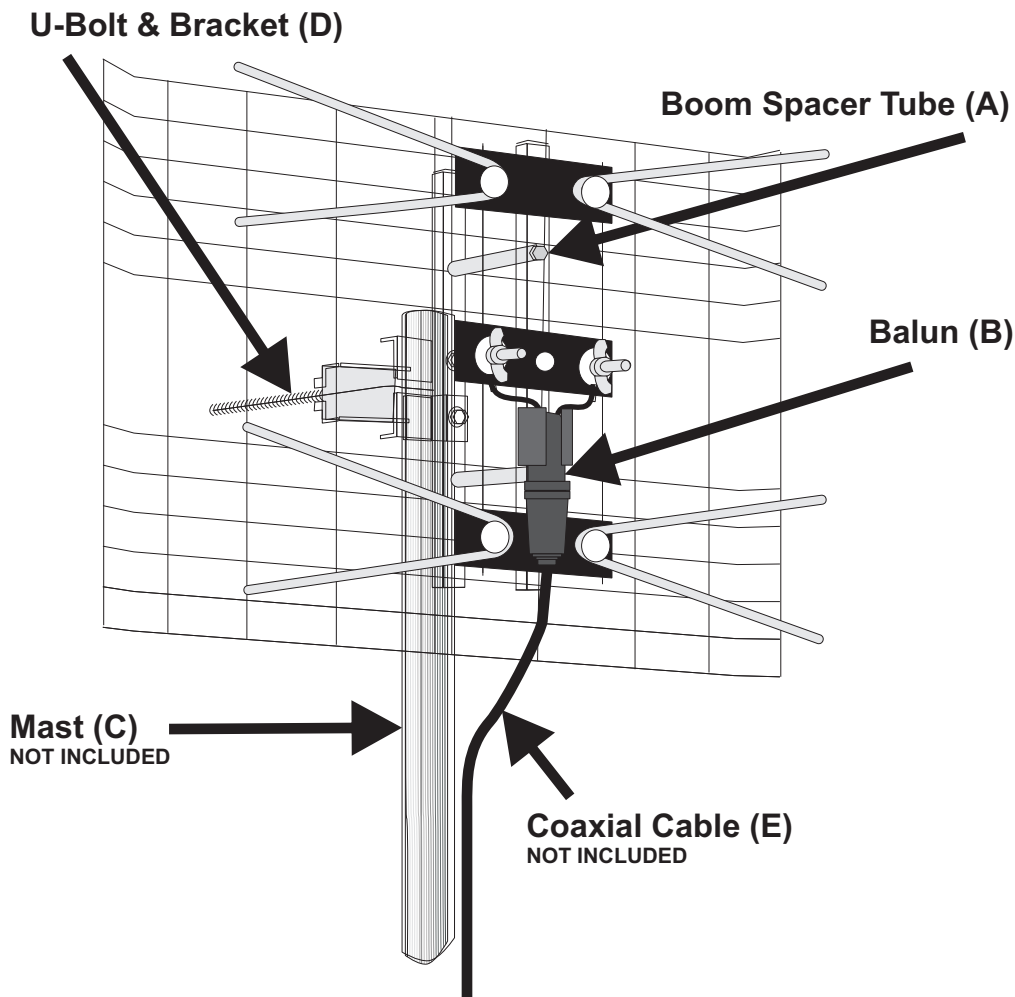

Warranty Terms: Pro Brand International warrants this product for a period of one year from the date of purchase. Pro Brand International accepts no responsibility, either direct or consequential, beyond the repair or replacement of the unit. Warranty units to be returned freight prepaid at owner's expense.

 **Pro Brand**
International, Inc.

MADE IN TAIWAN