

Supurr-Flex® pure aluminum, multi-layered flexible metallic duct



F0420B, F0425, F0450

Model No.	Description
F0420B	Supurr-Flex® multi-layered duct
F0425	Supurr-Flex® multi-layered duct
F0450	Supurr-Flex® multi-layered duct

Performance Data

for uninsulated aluminum, multi-layered flexible metallic duct

Maximum Velocity

- 5000 FPM / 25 m/sec

Maximum Rated Pressures

- all diameters 10" W.C / 2.5 Kpa Pos.
- 4" dia., .5" W.C / .12 Kpa Neg.

Operating Temperature Range



- 0 to 266 F / -18 C to 130 C Intermittent

Pressure Drops (see chart)

General Information

- compressed Length :25ft(7.6m) to 15"(.3m)
- this product was designed to replace vinyl duct and is easy to install
- fire retardant, NO exposed polyester inside or outside

Pressure Loss Diagram

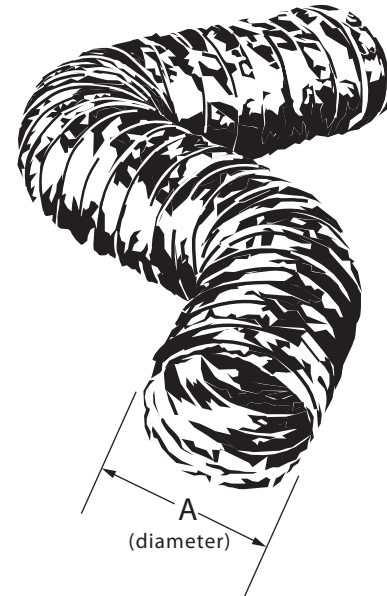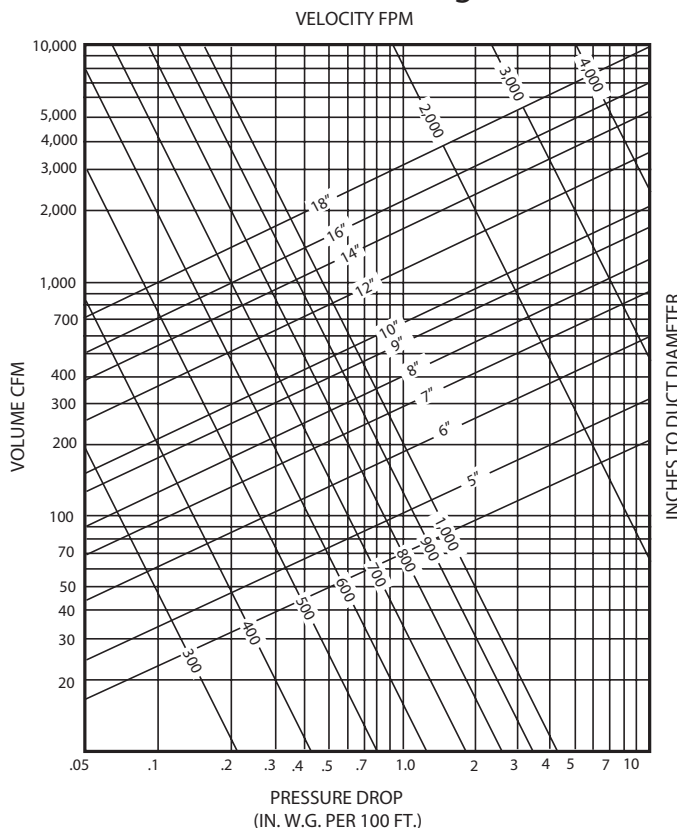

Model No.	diameter	length
F0420B	4" dia.	20ft(6m)
F0425	4" dia.	25ft(7m)
F0425	4" dia.	50ft(15m)