

Catalog 2014

Tram-Browning, Inc.
757 Enterprise Dr.
Edmond, OK 73013
USA

Combination GPS-VHF Antenna/ Mount

145-172 MHz 3 dB Gain Pre Tuned

- GPS antenna 3/4" hole mounting with NMO mount
- VHF NMO wide band - no tuning coil with 32" whip
- 17' RG-58/U w/ loose Mini-UHF Male or UHF Male
- 17' RG-174 w/ SMA Male installed



browning[®]

(GPS/NMO MOUNT HOUSING)

Model Description

BR-2111-MUHF	GPS/VHF Kit
BR-2111-CUHF	GPS/VHF Kit
BR-2100-MUHF	GPS/NMO Mount
BR-2100-CUHF	GPS/NMO Mount

(GPS/NMO mount can be used with any NMO antenna, frequency 1572.42 MHz)

PRSRRT STD
U.S. POSTAGE
PAID
PERMIT No. 2000
OKLA CITY, OK

Wide Band, No Tuning Omni Bases


- Pre Tuned • No-Ground Plane • Heavy Duty Fiberglass • N Female Connector • 150 Watts
- Mounting Bracket & Hardware • Poly Bag w/Header Card • UPC Coded

146-167 MHz 2 dBd Gain

21 MHz Band Width

- 43" (1.1m) Tall

Model BR-6051

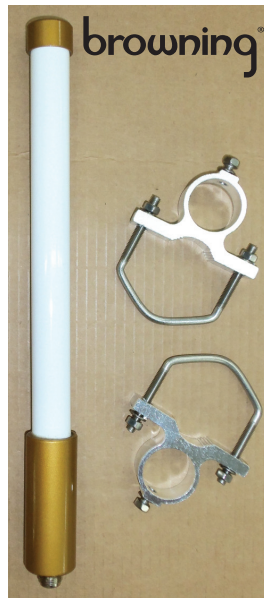

BR-6051 & BR-6157

410-490 MHz 4.5 dBd Gain

80 MHz Band Width

- 34" (85cm) Tall • 5/8 Over 5/8 Wave

Model BR-6157

Freq. MHz	SWR
146	<1.76:1
150	<1.26:1
155	<1.23:1
160	<1.39:1
165	<1.88:1

Freq. MHz	SWR
413	<1.89:1
430	<1.33:1
450	<1.03:1
470	<1.37:1
490	<1.69:1