

NMO 3/4" Hole Mounts

- Standard thickness mounting • Solid brass w/gold contact pin
- Poly bag w/header card for display - UPC coded
- 17 ft. RG-58A/U tinned copper braid 95% & stranded tinned copper center conductor

BR-1010 No-connector
BR-1010-UHF UHF Male PL-259 connector installed

- 17 ft. RG-58A/U bare copper braid 95% & solid bare copper center conductor

BR-1011 No-connector
BR-1011-MUHF Mini-UHF Male connector installed
BR-1011-FME FME Female connector installed

- 17 ft. low loss RG-58A/U tinned double shield 95% braid + aluminum foil & stranded tinned copper center conductor

BR-1251 No-Connector
BR-1251-MUHF Mini-UHF Male connector installed
BR-1250 UHF Male w/molded strain relief installed

NMO 3/4" Hole Mounts w/BR-195 Cable

- Standard thickness mounting • Solid brass w/gold contact pin
- 17 ft. super low loss BR-195 cable (see page 22 for specs)
- BR-195 cable uses standard RG-58 connectors
- Nickel plated solid brass installed connectors w/gold contact pins • Bulk packaging

BR-362 No-connector
BR-362-UHF UHF Male w/molded strain relief installed
BR-362-MUHF Mini-UHF Male connector installed
BR-362-FME FME Female connector installed

High Frequency Fully Shielded 3/4" NMO Hole Mounts

- Fully enclosed/fully shielded zinc housing • Fully weatherized
- Solid brass NMO • Gold contact pin
- Nickel plated solid brass installed connectors w/gold contact pins
- 17 ft. low loss double shielded RG-58A/U w/stranded center
- Poly bag w/header card for display - UPC coded

BR-1258 No-Connector
BR-1258-UHF UHF Male PL-259 connector installed
BR-1258-MUHF Mini-UHF Male connector installed
BR-1258-BNC BNC Male connector installed

- 17 ft. super low loss BR-195 cable (see page 22 for specs) • Bulk packaging

BR-364 No-Connector
BR-364-UHF UHF Male PL-259 connector installed
BR-364-MUHF Mini-UHF Male connector installed
BR-364-FME FME Female connector installed

High Frequency Fully Shielded 3/4" NMO Hole Mounts


- Fully enclosed/fully shielded zinc housing • Fully weatherized
- Solid brass NMO • Gold contact pin
- 17 ft. super low loss BR-200 cable (see page 22 for specs)
- Crimp connectors - silver plated, solid brass, gold contact pin • Bulk packaging

Standard NMO Small Contact Pin - to 3 GHz

BR-367 No-Connector
BR-367LUHF UHF Male crimp/solder conn. loose
BR-367LMUHF Mini-UHF Male crimp conn. loose
BR-367LMUHFF Mini-UHF Female crimp conn. loose
BR-367LBNC BNC Male crimp conn. loose
BR-367LBNCF BNC Female crimp conn. loose
BR-367LBNCRP BNC Male reverse polarity crimp conn.loose
BR367LBNCFRP BNC Female reverse polarity crimp con.loose
BR-367LTNC TNC Male crimp conn. loose
BR-367LTNCF TNC Female crimp conn. loose
BR-367LTNCRP TNC Male reverse polarity crimp con. loose
BR367LTNCFRP TNC Female reverse polarity crimp con. loose
BR-367LSMA SMA Male crimp conn. loose

High Frequency Female Contact Pin NMO - to 6 GHz

BR-368 No-Connector
BR-368LUHF UHF Male crimp/solder conn. loose
BR-368LMUHF Mini-UHF Male crimp conn. loose
BR-368LMUHFF Mini-UHF Female crimp conn. loose
BR-368LBNC BNC Male crimp conn. loose
BR-368LBNCF BNC Female crimp. conn. loose
BR-368LBNCRP BNC Male reverse polarity crimp conn. loose
BR368LBNCFRP BNC Female reverse polarity crimp. con.loose
BR-368LTNC TNC Male crimp conn. loose
BR-368LTNCF TNC Female crimp conn. loose
BR-368LTNCRP TNC Male reverse polarity crimp.con. loose
BR368LTNCFRP TNC Female reverse polarity crimp con. loose
BR-368LSMA SMA male crimp conn. losse

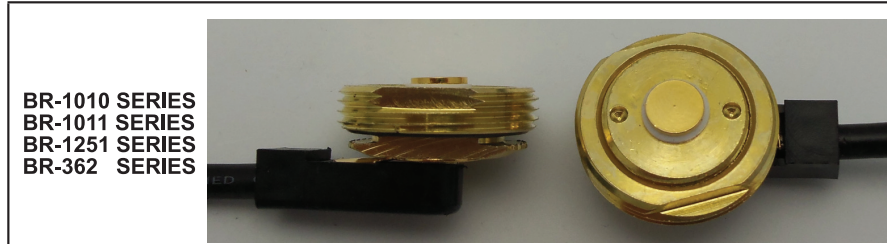

3/4" Hole NMO L Bracket

Poly bag w/ header card for display • UPC coded

Model	Description
BR-34	Stainless steel for trunk/fender groove
BR-34-B	Black stainless steel for trunk/fender groove



15 AMP • 250 Watts

Land Mobile Class Noise Filter

Heavy Duty Suppression of Alternator and Ignition Noise

High Inductance Iron Core Coil
10,000 MFD Bypass Electrolytic Capacitor
Poly bag w/ header card for display UPC coded

Model
BR-FILTER

