

Prüfbericht - Nr.: TSZ21120081-P01-R01			Seite 1 von 20		
Test Report No.:			Page 1 of 20		
Auftraggeber:			SHEN ZHEN YONG DA JIA TECHNOLOGY CO., LTD.		
Client:			3rd Floor, No.24 Youganyuan Road, Anliang Village, Henggang Town, Longgang District, Shenzhen, Guangdong, China		
Gegenstand der Prüfung:			Polymer Li-ion Cell		
Test item:					
Bezeichnung:		104050	Serien-Nr.:		N/A
Identification:			Serial No.:		
Wareneingangs-Nr.:		TSZ21120081-P01	Eingangsdatum:		2022-02-24
Receipt No.:			Date of receipt:		
Prüfört:			Shenzhen Tiansu Calibration and Testing Co., Ltd.		
Testing location:			Building 1/4, No.2, Jinlong Road, Longgang District, Shenzhen, Guangdong, China		
Prüfgrundlage:			UL 1642: 2020		
Test specification:					
Prüfergebnis:			Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).		
Test Result:			The test item passed the test specification(s).		
Prüflaboratorium:			Shenzhen Tiansu Calibration and Testing Co., Ltd.		
Testing Laboratory:			Building 1/4, No.2, Jinlong Road, Longgang District, Shenzhen, Guangdong, China		
geprüft/ tested by:			kontrolliert/ reviewed by:		
Dove Fan			Chovy Qiu		
2022-02-24 Dove Fan / Project Engineer			2022-02-24 Chovy Qiu / Reviewer		
Datum	Name/Stellung	Unterschrift	Datum	Name/Stellung	Unterschrift
Date	Name/Position	Signature	Date	Name/Position	Signature
Sonstiges/ Other Aspects:					
The complete test report includes the following documents: - UL 1642 Test report (20 pages); - Attachment 1: Equipment list (4 pages); - Attachment 2: Photo documents (1 page).					
Abkürzungen:			Abbreviations:		
P(ass) = entspricht Prüfgrundlage			P(ass) = passed		
F(ail) = entspricht nicht Prüfgrundlage			F(ail) = failed		
N/A = nicht anwendbar			N/A = not applicable		
N/T = nicht getestet			N/T = not tested		
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</p> <p><i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i></p>					

Test item particulars:

Information about the product needed to establish a correct test program, such as product mobility, type of power connections and similar. (Test item particulars are selected by the TRF Originator base on the requirements in the standard)

Designation.....: 104050

Trademark.....: N/A

Nominal voltage.....: 3.7V

Rated capacity.....: 2500mAh

Maximum charge voltage.....: 4.20V

End discharge voltage.....: 2.75V

Manufacturer's charge method.....: Charge the cell at 500mA CC to 4.20V, then 4.20V CV until charging current reaches 25mA at ambient 20±5°C.

Utilization Type.....: Technician replaceable cell

Sample Number.....: TCTTJ20210508915ZB-501010-C01# to
TCTTJ20210508915ZB-501010-C115#

Possible test case verdicts:

Test case does not apply to the test object.....: N/A

Test object does meet the requirement.....: P(ass)

Test object does not meet the requirement.....: F(ail)

Testing:

Date of receipt of test item.....: 2022-01-06

Date(s) of performance of tests.....: 2022-01-06 to 2022-01-15

General remarks:

This report shall not be reproduced, except in full, without the written approval of the testing laboratory.

The test results presented in this report relate only to the object tested.

"(see remark #)" refers to a remark appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a point is used as the decimal separator.

Copy of marking plate:

-	Polymer Li-ion Cell 104050
+	3.7V 2500mAh 9.25Wh YYYYMMDD SHEN ZHEN YONG DA JIA TECHNOLOGY CO., LTD.

Remark:

YYYYMMDD represents the date of manufacture. "YYYY" represents the year, "MM" represents the month, "DD" represents the day.

Summary of testing:

The component cell is evaluated in this test report per the following test items according to UL 1642: 2020. Charging method declared by the manufacturer:

Charge the cell at 500mA CC to 4.20V, then 4.20V CV until charging current reaches 25mA at ambient $20\pm 5^{\circ}\text{C}$.

Test items:

- cl.10 Short-Circuit Test;
- cl.11 Abnormal Charging Test;
- cl.13 CrushTest;
- cl.14 ImpactTest;
- cl.15 Shock Test;
- cl.16 Vibration Test;
- cl.17 Heating Test;
- cl.18 Temperature Cycling Test;
- cl.19 Low Pressure (Altitude Simulation) Test;
- cl.20 Projectile Test※

Remark: Parameter with asterisk "※" is not within the accreditation by CNAS.


Description of the product:

This cell consists of the positive electrode plate, negative electrode plate, separator and electrolyte. The positive and negative electrode plates are housed in the case in the state being separated by the separator.

- 1) These tested cells have not been evaluated in combination with charger(s) or host product(s). Additional evaluation to determine compliance may be required on the combination(s) in the end product evaluation.
- 2) The tested cells were evaluated for a maximum charge current and maximum voltage limit outlined in the Table below. The end product evaluation shall ensure that current and voltage limits noted are maintained.
- 3) The charging temperature is 0 to 45°C and the discharging temperature is -10 to 60°C .

- Electrical parameter:

Model	Nominal capacity	Nominal voltage	Nominal Charge current	Nominal discharge current	Max. charge current	Max. discharge current	Max. charge voltage	End discharge voltage
104050	2500mAh	3.7V	500mA	500mA	2500mA	2500mA	4.20V	2.75V

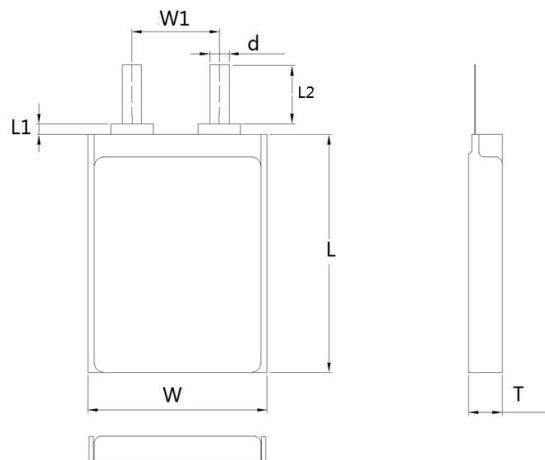Construction:

T*W*L: 10.2mm*40.0mm*51.0mm

Factory location :

SHEN ZHEN YONG DA JIA TECHNOLOGY CO., LTD.

3rd Floor, No.24 Youganyuan Road, Anliang Village, Henggang Town, Longgang District, Shenzhen, Guangdong,

China

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict

INTRODUCTION			
1	Scope		P
2	General		P
3	Glossary		P
CONSTRUCTION			
4	General		N/A
4.1	Casing		N/A
4.1.1	The casing of a lithium battery shall have the strength and rigidity necessary to resist the abuses to which it may be subjected, without resulting in a risk of fire. The casing of a user-replaceable lithium battery shall have the strength and rigidity necessary to resist the abuses to which it may be subjected without resulting in a risk of injury to persons.	Technician replaceable cell without enclosure.	N/A
4.1.2	A cell of a user-replaceable battery shall be in a rigid casing of sufficient strength to prevent flexing. A tool providing the mechanical advantage of a pliers, screwdriver, or hacksaw shall be the minimum capable of opening the user-replaceable cell casing, if opening of the casing will expose metallic lithium.	See above	N/A
4.2	Electrolyte		N/A
4.2.1	A user-replaceable battery shall not contain pressurized vapor or liquid that could spray materials into the eyes or leak more than 5 ml of liquid when the battery casing is punctured under normal laboratory conditions, 23 ±2°C (73 ±3.6°F).	Technician-replaceable Batteries.	N/A
4.3	Use		N/A
4.3.1	A lithium battery shall be protected from abnormal charging currents during use. A battery tested and found acceptable for the charging current, I_c (see Section 11), under fault conditions specified by the manufacturer, shall be protected from larger charging currents in the end product application by: a) Two blocking components, such as diodes, or b) One blocking component and one current limiting component, such as a resistor or a fuse. The current limiting component shall limit the charging current to one-third the value used in the Abnormal Charging Test, Section 11.	Cell only	N/A
PERFORMANCE			
5	General		P
5.1	Technician-replaceable Batteries		P

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
5.1.1	Technician-replaceable lithium cells or batteries are to be tested as described in Sections 10 – 20. Section 12, Forced-Discharge Test, is applicable only to cells intended to be used in series-connected multicell applications such as battery packs. For multicell installations, also see 5.3.1.		P
5.1.2	When a fire or explosion occurs as a result of the Crush Test, Section 13, or the Impact Test, Section 14, or the cell or battery ruptures to the extent that the aluminum test cage is penetrated during the Projectile Test, Section 20; the use of the technician replaceable cell or battery shall be restricted to applications in which it is not exposed to, or is protected from, any conditions shown to cause a fire or explosion.	No fire or explosion occurs	P
5.1.3	Cells and batteries subjected to the Shock Test, Section 15, Vibration Test, Section 16, Temperature Cycling Test, Section 18, and Low Pressure (Altitude Simulation) Test, Section 19, shall also not leak or vent. For these tests, unacceptable leakage is determined to have occurred when the resulting mass loss exceeds the values shown in Table 5.1, Venting and leakage mass loss criteria.	No leak or vent	P
5.2	User-replaceable Batteries		N/A
5.2.1	User-replaceable lithium cells or batteries are to be tested as described in Sections 10 – 20. Section 12, Forced Discharge Test, is applicable only to cells intended to be used in multicell applications such as battery packs. In addition to complying with the requirements for a technician replaceable cell or battery as specified in 5.1.1, a user-replaceable cell or battery shall not explode or ignite when subjected to the Crush Test, Section 13, or the Impact Test, Section 14. A user-replaceable battery shall comply with the requirements for Sections 10 – 20 and with the applicable construction requirements outlined in Section 4. Secondary lithium cells shall not be considered user-replaceable.	Technician-replaceable cell	N/A
5.2.2	Sets of five specimens each are to be used for the Projectile Test, Section 20.3; see Table 6.1. When only one specimen from a set of five does not comply with the requirements, another set of five specimens is to be tested. All specimens from this second set shall comply with the requirements.	Technician-replaceable cell	N/A
5.3	Multicell Installations		N/A
5.3.1	A technician-replaceable or user-replaceable cell intended for use in multicell installations or battery packs shall also be tested as described in 10.3 and Section 12. No fire or explosion shall occur as a result of these tests. In addition, batteries subjected to the test described in 10.3 shall meet the requirements as described in 5.1.1 and 5.2.1 for a cell or battery subjected to the Short-Circuit Test, Section 10.	Single cell.	N/A

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
6	Samples		P
6.1	Fully charged primary cells or batteries and primary cells or batteries that have been conditioned by partial or complete discharge, or both, are to be used for the tests described in Sections 10 – 20. The number of samples to be used in each test for a primary cell or battery is shown in Table 6.1. When a group of cells or batteries of different sizes, but similar chemistries is involved, selected sizes representative of the range are to be tested.	The samples are secondary cells.	N/A
6.2	Fully charged secondary cells or batteries and secondary cells or batteries that have been conditioned by charge-discharge cycling are to be used for the tests described in Sections 10 – 20. The number of samples to be used in each test for a secondary cell or battery is shown in Table 6.2. When a group of cells or batteries of different sizes, and similar chemistries is involved, selected sizes representative of the range are to be tested.	The samples are secondary technician-replaceable cells. Prepared as required.	P
6.3	Prior to conducting the testing in Section 17, the lithium ion cell samples shall be pre-conditioned as outlined in 6.4 and 6.5.	Prepared as required.	P
6.4	For the heating test of Section 17, two sets of five lithium ion cell samples are to be fully discharged (i.e. to the manufacturer's specified end point voltage). The samples are then placed in a test chamber and conditioned for 1 to 4 h (5 samples at the upper temperature limit and 5 samples at the lower temperature limit of the operating region) as outlined in Table 6.3.	Prepared as required.	P
6.5	While still in the test chamber set at the temperature limits, the samples are charged (5 samples at the upper temperature limit and 5 samples at lower temperature limit) at the specified maximum charging current and upper limit charging voltage per Table 6.3, using a constant voltage charging method. Charging is continued until the charge current is reduced to the specified end of charge conditions (i.e. 0.05 times the charge current).	Prepared as required.	P
7	Conditioning of Samples		P
7.1	Discharge		N/A
7.1.1	Primary batteries are to be completely discharged by connecting their terminals through resistors that provide the desired level of discharge within 60 days. Batteries are to be discharged at room temperature. Cells with a liquid cathode such as thionyl chloride or sulfur dioxide, shall also be conditioned by one-half discharge	The samples are secondary cells.	N/A

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
7.1.2	For solid electrolyte and other types of primary lithium batteries that cannot be discharged within 60 days because of the small currents they inherently produce, longer discharge times plus discharge at higher temperatures may be used to obtain the desired level of discharge. The manufacturer's recommended discharge procedures are to be followed so as to obtain the required discharge level in the minimum time.	The samples are secondary cells.	N/A
7.2	Charge-discharge cycling		P
7.2.1	Secondary cells are to be conditioned at 25°C (77°F). Cells are continuously cycled as per the manufacturer's specifications. The specification shall be such that the full rated capacity of the cell is utilized and the number of cycles accumulated shall be at least equal to 25% of the advertised cycle life of the cell or cycled continuously for 90 days, whichever is shorter. Cycling is to be done either individually or in groups. Cells are to be recharged prior to testing as indicated in Table 6.2.	The samples are cycled at manufacturer's factory before they were sent for test.	P
8	Important test considerations		P
8.1	Some lithium batteries are capable of exploding when the tests described in Sections 10-20 are conducted. It is important that personnel be protected from the flying fragments, explosive force, sudden release of heat, and noise that results from such explosions. The test area is to be well ventilated to protect personnel from possible harmful fumes or gases.	Prepared the tests as required.	P
8.2	As an additional precaution, the temperatures on the surface of the battery casings shall be monitored during the tests described in Sections 10, 11, 12, 13, and 14. All personnel involved in the testing of lithium batteries are to be instructed never to approach a lithium battery while the surface temperature exceeds 90°C (194°F) and not to touch the lithium battery while the surface temperature exceeds 45°C (113°F).	Prepared the tests as required.	P
8.3	For protection, the Projectile Test, Section 20 is to be conducted in a room separate from the observer.	Prepared the tests as required.	P
9	Temperature measurements		P
9.1	Temperatures are to be measured by thermocouples consisting of wires not larger than 24 AWG (0.21 mm ²) and not smaller than 30 AWG (0.05 mm ²) and a potentiometer-type instrument.	Prepared the tests as required.	P
9.2	The temperature measurements on the batteries are to be made with the measuring junction of the thermocouple held tightly against the metal casing of the battery.	Prepared the tests as required.	P
TESTS FOR TECHNICIAN-REPLACEABLE AND USER-REPLACEABLE BATTERIES			
ELECTRICAL TESTS			

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
10	Short-Circuit Test		P
10.1	Each test sample battery, in turn, is to be short-circuited by connecting the positive and negative terminals of the battery with a circuit load having a resistance load of $80 \pm 20 \text{ m}\Omega$. The temperature of the battery case is to be recorded during the test. The battery is to discharge until a fire or explosion is obtained, or until it has reached a completely discharged state of less than 0.2 V and the battery case temperature has returned to $\pm 10^\circ\text{C}$ ($\pm 18^\circ\text{F}$) of ambient temperature. The voltage at the end of the test may not reach 0.2 V due to operation of protective devices in the circuit. The return to near ambient of the battery (cell) casing is an indication of ultimate results.	Tested as required. See table 10	P
10.2	Tests are to be conducted at $20 \pm 5^\circ\text{C}$ ($68 \pm 9^\circ\text{F}$) and at $55 \pm 5^\circ\text{C}$ ($131 \pm 9^\circ\text{F}$). The batteries are to reach equilibrium at $20 \pm 5^\circ\text{C}$ or $55 \pm 5^\circ\text{C}$, as applicable, before the terminals are connected.	Tested as required.	P
10.3	A battery is to be tested individually unless the manufacturer indicates that it is intended for use in series or parallel. For series or parallel use, additional tests on five sets of batteries are to be conducted using the maximum number of batteries to be covered for each configuration.	Tested as required.	P
10.4	When an overcurrent protective device activates during the test, the test shall be repeated with the battery supply connected to the maximum load that does not cause the protective device to open. Protective devices that are relied upon to meet the compliance criteria for the short circuit test shall comply with 2.3.1.	Only single lithium-ion cell, no over-current or thermal protective device was integrated into the cell.	N/A
10.5	The samples shall not explode or catch fire.	The test results meet the requirements.	P
11	Abnormal Charging Test		P
11.1	Primary cells or batteries shall comply with 11.2—11.7.	Secondary cell	N/A
11.2	Cells or batteries conditioned in accordance with Tables 6.1, as applicable, are to be used for this test. The batteries are to be tested in an ambient temperature of $20 \pm 5^\circ\text{C}$ ($68 \pm 9^\circ\text{F}$).		N/A

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
11.3	<p>Each test sample battery is to be subjected to a charging current of three times the current I_c, specified by the manufacturer by connecting it in opposition to a dc-power supply. The specified charging current is to be obtained by connecting a resistor of the specified size and rating in series with the battery. The test charging time is to be calculated using the formula:</p> $t_c = \frac{2.5C}{3(I_c)}, \text{ in which}$ <p><i>t_c</i> is the charging time in hour <i>C</i> is the capacity of the cell/batteiy in ampere-hours, and <i>I_c</i> is the maximum charging current, in amperes, specified by the manufacturer. The minimum charging time is to be 7 hours.</p>		N/A
11.4	<p>When a non-resettable overcurrent or protective device operates during the test, the test is to be repeated at a charge current below the level that the protective device operates. When a resettable protective device operates during the test, the protector is allowed to reset to a total of 10 cycles; or until the appropriate charging time has been completed, but not less than 7 hours. Protective devices that are relied upon to meet the compliance criteria for the abnormal charging test shall comply with 2.3.1.</p>		N/A
11.5	The samples shall not explode or catch fire.		N/A
11.6	Secondary cells or batteries shall comply with 11.7 – 11.10.	See table 11, tested as required	P
11.7	Cells or batteries conditioned in accordance with Tables 6.2, as applicable, are to be used for this test. The batteries are to be tested in an ambient temperature of 20 ±5°C (68 ±9°F).	Tested as required.	P
11.8	Each test sample battery is to be discharged at a constant current of 0.2 C/1 h, to a manufacturer specified discharge endpoint voltage. The cell or battery is then to be charged with a constant maximum specified output voltage and a current limit of three times the maximum charging current I_c , specified by the manufacturer. Charging duration is to be 7 hours or the time required to reach the manufacturer's specified end-of-charge condition, whichever is greater.	Tested as required.	P
11.9	<p>When a non-resettable overcurrent or protective device operates during the test, the test shall be repeated at an overcharging current below the level that the protection device operates. When a resettable protective device operates during the test, the protector is to be allowed to reset to a total of 10 cycles; or until the appropriate charging time has been completed, but not less than 7 hours. Protective devices that are relied upon to meet the compliance criteria for the abnormal charging test shall comply with 2.3.1.</p>	The samples are to be tested without any assistance of over-current or thermal protective devices.	N/A

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
11.10	The samples shall not explode or catch fire.	No explosion or catch fire during and after the test	P
12	Forced-Discharged Test		N/A
12.1	This test is intended for cells that are to be used in series-connected, multicell applications, such as battery packs.	single cell	N/A
12.2	A fully discharged cell is to be force-discharged by connecting it in series with fully charged cells of the same kind. The number of fully charged cells to be connected in series with the discharged cell is to equal the maximum number less one of the cells to be covered for series use. Five cells are to be completely discharged, at room temperature.		N/A
12.3	Once the fully discharged cell is connected in series with the specified number of fully charged cells the resultant battery pack is to be short circuited.		N/A
12.4	The positive and negative terminals of the sample are to be connected with a copper wire with a resistance load of $80 \pm 20 \text{m}\Omega$. The sample is to discharge until a fire or explosion is obtained, or until it has reached a completely discharged state of less than 0.2V and the battery case temperature has returned to $\pm 10^\circ\text{C}$ (18°F) of ambient temperature. The voltage at the end of the test may not reach 0.2V due to operation of protective devices in the circuit. The return to near ambient of the cell casing is an indication of ultimate results.		N/A
12.5	When an overcurrent or protective operates during the test, the test shall be repeated with the battery supply connected to the maximum load that does not cause the protective device to open. Protective devices that are relied upon to meet the compliance criteria for the forced discharge test shall comply with 2.3.1.		N/A
12.6	The samples shall not explode or catch fire.		N/A
MECHANICAL TESTS			
13	Crush Test		P
13.1	A battery is to be crushed between two flat surfaces. The force for the crushing is to be applied by a hydraulic ram or similar force mechanism. The flat surfaces are to be brought in contact with the cells and the crushing is to be continued until an applied force of $13 \pm 1 \text{ kN}$ ($3000 \pm 224 \text{ lbs}$) is reached. Once the maximum force has been obtained it is to be released.	Tested as required. See table 13	P

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
13.2	<p>A cylindrical, pouch or prismatic cell is to be crushed with its longitudinal axis parallel to the flat surfaces of the crushing apparatus. A prismatic cell is also to be rotated 90° around its longitudinal axis so that both the wide and narrow sides will be subjected to the crushing force. Each sample is to be subjected to a crushing force in only one direction. Separate samples are to be used for each test.</p> <p>Exception: For Lithium ion systems, a cylindrical, pouch or prismatic cell is to be crushed with its longitudinal axis parallel to the flat surface of the crushing apparatus. Each sample is to be subjected to a crushing force in only one direction. Test only the wide side of pouch and prismatic cells.</p>	Tested as required. The sample are pouch lithium-ion cells.	P
13.3	A coin or button battery is to be crushed with the flat surface of the battery parallel with the flat surfaces of the crushing apparatus.	Not a coin or button battery	N/A
13.4	The samples shall not explode or catch fire.	No explosion or catch fire during and after the test	P
14	Impact Test		P
14.1	A test sample battery is to be placed on a flat surface. A 15.8 ±0.1-mm (5/8 ±0.004-in) diameter bar is to be placed across the center of the sample. A 9.1 ±0.46-kg (20 ±1-lb) weight is to be dropped from a height of 610 ±25 mm (24 ±1 in) onto the sample. See Figure 14.1.	Prepared the test as required. See table 14	P
14.2	<p>A cylindrical, pouch or prismatic cell is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8-mm (5/8-in) diameter curved surface lying across the center of the test sample. A prismatic cell is also to be rotated 90° around its longitudinal axis so that both the wide and narrow sides are subjected to the impact. Each sample is to be subjected to only a single impact. Separate samples are to be used for each test.</p> <p>Exception: For Lithium ion systems, a cylindrical, pouch or prismatic cell is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8-mm (5/8-in) diameter curved surface lying across the center of the test sample. Each sample is to be subjected to only a single impact. Test only the wide side of pouch and prismatic cells.</p>	Tested as required. The sample are pouch lithium-ion cells.	P
14.3	A coin or button battery is to be impacted with the flat surface of the test sample parallel to the flat surface and the 15.8-mm (5/8-in) diameter curved surface lying across its center.	Not a coin or button battery	N/A
14.4	The samples shall not explode or catch fire.	No explosion or catch fire during and after the test	P
15	Shock Test		P

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
15.1	The cell is to be secured to the testing machine by means of a rigid mount which supports all mounting surfaces of the cell. Each cell shall be subjected to a total of three shocks of equal magnitude. The shocks are to be applied in each of three mutually perpendicular directions unless it has only two axes of symmetry in which case only two directions shall be tested. Each shock is to be applied in a direction normal to the face of the cell. For each shock the cell is to be accelerated in such a manner that during the initial 3 ms the minimum average acceleration is 75 g (where g is the local acceleration due to gravity). The peak acceleration shall be between 125 and 175 g. Cells shall be tested at a temperature of 20 ± 5°C (68 ± 9°F).	Prepared the test as required. See table 15	P
15.2	The samples shall not explode or catch fire. In addition, the sample shall not vent or leak as described in 5.1.1.	No explosion or catch fire, the sample not vent or leak	P
16	Vibration Test		P
16.1	A battery is to be subjected to simple harmonic motion with an amplitude of 0.8 mm (0.03 inch) [1.6 mm (0.06 inch) total maximum excursion].	Prepared the test as required. See table 16.	P
16.2	The frequency is to be varied at the rate of 1 Hz/min between 10 and 55 Hz, and return in not less than 90 nor more than 100 min. The battery is to be tested in three mutually perpendicular directions. For a battery that has only two axes of symmetry, the battery is to be tested perpendicular to each axis.	Tested as required.	P
16.3	The samples shall not explode or catch fire. In addition the sample shall not vent or leak as described in 5.1.1.	No explosion or catch fire, the sample not vent or leak	P
ENVIRONMENTAL TESTS			
17	Heating Test		P
17.1	A battery is to be heated in a gravity convection or circulating air oven with an initial temperature of 20±5°C (68±9°F). The temperature of the oven is to be raised at a rate of 5±2°C (9±3.6°F) per minute to a temperature of 130±2°C (266±3.6°F) and remain for 10 min. The sample shall return to room temperature (20±5°C) and then be examined. For batteries specified for temperatures above 100°C (212°F), the conditioning temperature shall be increased from 130±2°C (266±3.6°F), to 30±2°C (86±3.6°F) above the manufacturers maximum specified temperature. For a battery of lithium metal chemistry, the conditioning temperature shall be increased to a maximum of 170 ±2°C (338±3.6°F).	Tested as required. Oven temperature: 130°C.	P
17.2	The samples shall not explode or catch fire.	No explosion or catch fire	P
18	Temperature Cycling Test		P

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
18.1	The batteries are to be placed in a test chamber and subjected to the following cycles: a) Raising the chamber-temperature to 70 ±3°C (158 ±5°F) within 30 minutes and maintaining this temperature for 4 hours. b) Reducing the chamber temperature to 20 ±3°C (68 ±5°F) within 30 minutes and maintaining this temperature for 2 hours. c) Reducing the chamber temperature to minus 40 ±3°C (minus 40 ±5°F) within 30 minutes and maintaining this temperature for 4 hours. d) Raising the chamber temperature to 20 ±3°C (68 ±5°F) within 30 minutes. e) Repeating the sequence for a further 9 cycles. f) After the 10th cycle, storing the batteries for a minimum of 24 hours, at a temperature of 20 ±5°C (68 ±9°F) prior to examination.	Tested as required. See table 18	P
18.2	The samples shall not explode or catch fire. In addition, the samples shall not vent or leak as described in 5.1.1.	No explosion or catch fire, the sample not vent or leak	P
19	Low Pressure (Altitude Simulation) Test		P
19.1	Sample batteries are to be stored for 6 hours at an absolute pressure of 11.6 kPa (1.68 psi) and a temperature of 20 ± 3°C (68 ± 5°F).	Tested as required. See table 19	P
19.2	The samples shall not explode or catch fire as a result of the Low Pressure (Altitude Simulation) Test. In addition, the samples shall not vent or leak as described in 5.1.1.	No explosion or catch fire, the sample not vent or leak	P
FIRE EXPOSURE TEST			
20	Projectile Test		P
20.1	When subjected to the test described in 20.2 - 20.5 no part of an exploding cell or battery shall penetrate the wire screen such that some or all of the cell or battery protrudes through the screen.	The test results meet the requirements.	P
20.2	Each test sample cell or battery is to be placed on a screen that covers a 102 mm (4 inch) diameter hole in the center of a platform table. The screen is to be constructed of steel wire mesh having 20 openings per inch (25.4 mm) and a wire diameter of 0.017 inch (0.43 mm).	Prepared the test as required.	P
20.3	The screen is to be mounted 38 mm (1-1/2 inch) above a Maker type burner. The fuel and air flow rates are to be set to provide a bright blue flame that causes the supporting screen to glow a bright red.	Prepared the test as required.	P
20.4	An eight-sided covered wire cage, 610 mm (2 feet) across and 305 mm (1 foot) high, made from metal screening is to be placed over the test sample. See Figure 20.1. The metal screening is to be constructed from 0.25 mm (0.010 inch) diameter aluminum wire with 16 — 18 wires per inch (25.4 mm) in each direction.	Tested as required.	P

UL 1642:2020			
Clause	Requirement + Test	Result - Remark	Verdict
20.5	The sample is to be heated and shall remain on the screen until it explodes or the cell or battery has ignited and burned out. It is not required to secure the sample in place unless it is at risk of falling off the screen before the test is completed. When required, the sample shall be secured to the screen with a single wire tied around the sample.	Tested as required.	P
MARKING			
21	General		P
21.1	A battery shall be legibly and permanently marked with: The manufacturer's name, trade name, or trademark or other descriptive marking by which the organization responsible for the product may be identified; A distinctive ("catalog" or "model") number or the equivalent; The date or other dating period of manufacture not exceeding any three consecutive months.	See marking plate on page 3	P
21.2	If a manufacturer produces a battery at more than one factory, each battery package shall have a distinctive marking to identify it as the product of a particular factory.	single factory	N/A
22	Primary Batteries		N/A
22.1	A primary battery shall be marked with the word "WARNING" and the following or an equivalent statement: "Risk of fire and burns. Do not recharge, open, crush, heat above (the manufacturer's specified temperature rating), or incinerate." If space does not permit marking on the battery, the marking may be on the smallest unit package.	Secondary cell	N/A
22.2	The packaging for a user-replaceable battery shall be marked with the word "CAUTION" and the following or equivalent statements: "Risk of fire and burns. Do not recharge, disassemble, heat above (the manufacturer's specified temperature rating), or incinerate. Keep battery out of reach of children and in original package until ready to use. Dispose of used batteries promptly."		N/A
22.3	For user replaceable lithium primary coin cells (3.0 V) the packaging shall also include the following or equivalent: "WARNING – Never put batteries in mouth. Swallowing may lead to serious injury or death. If ingested, immediately seek medical attention and have the doctor phone the National Capital Poison Control Center." This marking may be combined with the marking of 22.2, if the signal word "WARNING" is used instead of "CAUTION."		N/A

Critical Components					
Material: e.g. external enclosure, PCB, closed-end connector, sleeves, cord anchorage etc					
Components with winding: e.g. motor, transformer, magnetic coil etc.					
Other components: e.g. switch, thermostat, heater, plug, internal wire, capacitor, relay, varistor etc.					
Object/ Part No.	Manufacturer/ trademark	Type/ Model	Technical data	Standard	Mark(s) of conformity
-Positive electrode	Jiangmen Keheng Industrial Co., Ltd	TE510	$\text{Li}(\text{Ni}_{0.5}\text{Co}_{0.2}\text{Mn}_{0.3})\text{O}_2$	--	--
-Negative electrode	Anhui new materials Co., Ltd	KD-1M	Material: Graphite, C content: $\geq 99.98\%$, Particle size D50(μm): 12 to 17	--	--
-Separator	Shenzhen Haike power supply Co., Ltd	46*20um	Material: PE/PP, Air permeability (s/100MI): 270 to 370, Porosity (%): $\geq 38\%$, Tensile strength (MPa): 400, Shutdown temperature ($^{\circ}\text{C}$): 125	--	--
-Electrolyte	Dongguan Tianfeng Power Material Co., Ltd	TF-009D	Composition: LiPF_6 +Solution, Conductivity (Ms/cm^2): 9.5	--	--

10	TABLE: Short-Circuit Test					P
Fully Charged Cell						
Ambient temperature: 22.7°C						
Sample No.	C01#	C02#	C03#	C04#	C05#	
Tmax(°C)	116.6	114.3	114.7	117.2	113.5	
Failure Mode	No	No	No	No	No	
Ambient temperature: 55.1°C						
Sample No.	C06#	C07#	C08#	C09#	C10#	
Tmax(°C)	118.4	113.5	112.6	119.7	114.5	
Failure Mode	No	No	No	No	No	
Cycled Cell						
Ambient temperature:22.7°C						
Sample No.	C61#	C62#	C63#	C64#	C65#	
Tmax(°C)	117.4	115.7	113.6	115.3	112.3	
Failure Mode	No	No	No	No	No	
Ambient temperature: 55.1°C						
Sample No.	C66#	C67#	C68#	C69#	C70#	
Tmax(°C)	119.5	113.4	109.8	112.4	116.1	
Failure Mode	No	No	No	No	No	
Supplementary information: Tmax was recorded on the centre of the cell sureface. No explode or catch fire.						

11	TABLE: Abnormal Charging Test					P
Ambient temperature: 23.1°C						
Id	<u>0.5 A</u>		Ue	<u>2.75 V</u>		
Ic	<u>2.5 A</u>		Uc	<u>4.2 V</u>		
Fully Charged Cell						
Sample No.	C11#	C12#	C13#	C14#	C15#	
Tmax(°C)	36.5	36.2	36.3	37.2	36.9	
Failure Mode	No	No	No	No	No	
Cycled cell						
Sample No.	C71#	C72#	C73#	C74#	C75#	
Tmax(°C)	37.1	36.2	36.4	36.1	36.5	
Failure Mode	No	No	No	No	No	
Supplementary information: Tmax was recorded on the centre of the cell surface; Test current is 7.5A. No explode or catch fire.						

13	TABLE: Crush Test					P
Ambient temperature: 23.1°C						
Fully Charged Cell						
Sample No.	C16#	C17#	C18#	C19#	C20#	
Catch fire	No	No	No	No	No	
Explode	No	No	No	No	No	
Crush direction	Wide side	Wide side	Wide side	Wide side	Wide side	
Failure mode	No	No	No	No	No	
Cycled cell						
Sample No.	C76#	C77#	C78#	C79#	C80#	
Catch fire	No	No	No	No	No	
Explode	No	No	No	No	No	
Crush direction	Wide side	Wide side	Wide side	Wide side	Wide side	
Failure mode	No	No	No	No	No	
Supplementary information: no explosion or catch fire.						

14	TABLE: Impact Test					P
Ambient temperature: 23.2°C						
Fully Charged Cell						
Sample No.	C21#	C22#	C23#	C24#	C25#	
Catch fire	No	No	No	No	No	
Explode	No	No	No	No	No	
Impact direction	Wide side	Wide side	Wide side	Wide side	Wide side	
Failure mode	No	No	No	No	No	
Cycled cell						
Sample No.	C81#	C82#	C83#	C84#	C85#	
Catch fire	No	No	No	No	No	
Explode	No	No	No	No	No	
Impact direction	Wide side	Wide side	Wide side	Wide side	Wide side	
Failure mode	No	No	No	No	No	
Supplementary information: no explosion or catch fire.						

15	TABLE: Shock Test					P
Ambient temperature: 23.5°C						
Fully Charged Cell						
Sample No.	C26#	C27#	C28#	C29#	C30#	
Mass before test (g)	38.532	38.800	38.722	38.425	38.821	
Mass after test (g)	38.529	38.796	38.718	38.423	38.818	
Mass loss ratio (%)	0.008	0.010	0.010	0.005	0.008	
Cycled cell						
Sample No.	C86#	C87#	C88#	C89#	C90#	
Mass before test (g)	38.443	38.430	38.523	38.778	38.505	
Mass after test (g)	38.441	38.426	38.518	38.772	38.502	
Mass loss ratio (%)	0.005	0.010	0.013	0.015	0.008	
Supplementary information: no explosion or catch fire, in addition the sample did not vent or leak. Max loss less than 0.1%						

16	TABLE: Vibration Test					P
Ambient temperature: 23.4°C						
Fully Charged Cell						
Sample No.	C31#	C32#	C33#	C34#	C35#	
Mass before test (g)	38.537	38.488	38.488	38.670	38.499	
Mass after test (g)	38.534	38.483	38.486	38.665	38.496	
Mass loss ratio (%)	0.008	0.013	0.005	0.013	0.008	
Cycled cell						
Sample No.	C91#	C92#	C93#	C94#	C95#	
Mass before test (g)	38.664	38.752	38.483	38.551	38.439	
Mass after test (g)	38.660	38.745	38.480	38.546	38.433	
Mass loss ratio (%)	0.010	0.018	0.008	0.013	0.016	
Supplementary information: no explosion or catch fire, in addition the sample did not vent or leak. Max loss less than 0.1%						

18	TABLE: Temperature Cycling Test					P
Ambient temperature: 22.9°C						
Fully Charged Cell						
Sample No.	C46#	C47#	C48#	C49#	C50#	
Mass before test (g)	38.640	38.471	38.706	38.482	38.627	
Mass after test (g)	38.623	38.458	38.693	38.474	38.609	
Mass loss ratio (%)	0.044	0.034	0.034	0.021	0.047	
Cycled cell						
Sample No.	C106#	C107#	C108#	C109#	C110#	
Mass before test (g)	38.464	38.645	38.721	38.705	38.605	
Mass after test (g)	38.451	38.632	38.703	38.687	38.594	
Mass loss ratio (%)	0.034	0.034	0.046	0.047	0.028	
Supplementary information: no explosion or catch fire, in addition the sample did not vent or leak. Max loss less than 0.1%						

19	TABLE: Low Pressure (Altitude Simulation) Test					P
Ambient temperature: 23.4°C						
Fully Charged Cell						
Sample No.	C51#	C52#	C53#	C54#	C55#	
Mass before test (g)	38.586	38.582	38.532	38.745	38.631	
Mass after test (g)	38.584	38.575	38.527	38.742	38.629	
Mass loss ratio (%)	0.005	0.018	0.013	0.008	0.005	
Cycled cell						
Sample No.	C111#	C112#	C113#	C114#	C115#	
Mass before test (g)	38.688	38.494	38.748	38.701	38.515	
Mass after test (g)	38.681	38.489	38.745	38.695	38.513	
Mass loss ratio (%)	0.018	0.013	0.008	0.016	0.005	
Supplementary information: no explosion or catch fire, in addition the sample did not vent or leak. Max loss less than 0.1%						

--End of report--

List of test equipment used**Testing location:**

Shenzhen Tiansu Calibration and Testing Co.,Ltd.

Building 1/4, No.2, Jinlong Road, Longgang District, Shenzhen, Guangdong, China

Clause	Measurement/ testing	Testing/measuring equipment/material used, (equipment ID)	Range used	Last calibration date	Calibration due date
10	Short-Circuit Test	TS-SB-06383/Digital Thermometer/HTC-1	Temperature: -10 to 50°C Humidity: 25%Rh to 98%Rh	2021/8/25	2022/8/24
		TS-SB-06727/ Temperature chamber/ RJD-DL-HT-400A-C2-B	Temperature: 20 to 80°C	2021/8/17	2022/8/16
		TS-SB-06411 /Resistance tester/ BT3563	Resistance: 1mΩ to 3Ω DC Voltage: 0.01V to 450V	2021/8/17	2022/8/16
		TS-SB-18109/High frequency data collector/ MR8875-30	Voltage: 10mV to 200V Temperature: -100 to 1372°C	2021/7/15	2022/7/14
		TS-SB-15023/Short circuit testing machine/ CZ-DL501T-CH12	Voltage: 0.001 to 30V Current: 0 to 500A Short-circuit resistance: 80±20mΩ Thermostat temperature: 0 to 80°C	2021/7/15	2022/7/14
11	Abnormal Charging Test	TS-SB-06405/Battery charging and discharging system/CT- 4008-5V12A-DB	Voltage: 25mV to 5V Current: 24mA to 12A	2021/8/17	2022/8/16
		TS-SB-07744/Digital temperature and hygrometer/HTC-1	Temperature: -10 to 50°C Humidity: 25%Rh to 98%Rh	2021/8/17	2022/8/16
		TS-SB-08945/Data collector/LR8431-30	Voltage: 0V to 60V Temperature: -100 to 1372°C	2021/8/17	2022/8/16
		TS-SB- 11726/Cronometro/TF30 7	Time: 5 to 3600s	2021/8/17	2022/8/16
		TS-SB-12568/Digital multimeter /17B+	DC Voltage: 0 to 1000V DC Current: 0 to 10A	2021/11/11	2022/11/10
13	Crush	TS-SB-06728/ Battery Crush Tester/RJD-2J- 2T-200	Voltage acquisition: 0.5 to 100V Temperature acquisition: 0 to 300°C Force: 0.4kN to 20kN Speed: 0.1 to 100mm/s	2021/8/17	2022/8/16

		TS-SB-07749/Digital temperature and hygrometer/HTC-1	Temperature: -10 to 50°C Humidity: 25%Rh to 98%Rh	2021/4/27	2022/4/26
		TS-SB-12568/Digital multimeter /17B+	DC Voltage: 0 to 1000V DC Current: 0 to 10A	2021/11/16	2022/11/15
14	Impact	TS-SB-06742/ Impact tester/RJD-ZWCJ-1000L	Hammer: 9.1kg±0.1kg Release height: 25 to 1000mm Rod: 15.8mm±0.1mm	2021/8/17	2022/8/16
		TS-SB-07748/Digital temperature and hygrometer/HTC-1	Temperature: -10 to 50°C Humidity: 25%Rh to 98%Rh	2021/4/27	2022/4/26
		TS-SB-12568/Digital multimeter /17B+	DC Voltage: 0 to 1000V DC Current: 0 to 10A	2021/11/16	2022/11/15
15	Shock	TS-SB-06747/ Shock Tester/RTZA-63-BT-C10	Peak acceleration: 1 to 30m/s ² , Pulse duration: 1 to 30ms,	2021/4/27	2022/4/26
		TS-SB-12647/ Electronic balance/ FA2204H	Range: 0.01g to 200g Precision: 0.0001g	2021/8/17	2022/8/16
		TS-SB-06383/Digital temperature and hygrometer/HTC-1	Temperature: -10 to 40°C Humidity: 40%Rh to 80%Rh	2021/8/17	2022/8/16
		TS-SB-12568/Digital multimeter /17B+	DC Voltage: 0 to 1000V DC Current: 0 to 10A	2021/11/16	2022/11/15
16	Vibration	TS-SB-06375/Vibration tester /DC-2200-26	Frequency range: 5 to 2000Hz MAX load: 300Kg MAX acceleration: 100 m/s ² MAX displacement: 51mm	2021/4/27	2022/4/26
		TS-SB-12647/ Electronic balance/ FA2204H	Range: 0.01g to 200g Precision: 0.0001g	2021/8/17	2022/8/16
		TS-SB-06383/Digital temperature and hygrometer/HTC-1	Temperature: -10 to 40°C Humidity: 40%Rh to 80%Rh	2021/8/17	2022/8/16
		TS-SB-12568/Digital multimeter /17B+	DC Voltage: 0 to 1000V DC Current: 0 to 10A	2021/11/16	2022/11/15
17	Heating	TS-SB-06720/ Thermal shock test chambers/ T-RHD-216X2-250P	Temperature: 20°C to 200°C Heating rate: 5.6°C /min	2021/8/17	2022/8/16
		TS-SB-07742/Digital temperature and hygrometer/HTC-1	Temperature: -10 to 50°C Humidity: 25%Rh to 98%Rh	2021/8/17	2022/8/16

		TS-SB-12568/Digital multimeter /17B+	DC Voltage: 0 to 1000V DC Current: 0 to 10A	2021/11/16	2022/11/15
		TS-SB-11726/Cronometro/TF307	Time: 5 to 3600s	2021/8/17	2022/8/16
18	Temperature Cycling	TS-SB-06724 /Constant temperature and humidity testing machine/T-FTH5-288-E	Temperature: -60°C to 150°C Humidity: 40% Rh to 98%Rh	2021/8/17	2022/8/16
		TS-SB-07741/Digital temperature and hygrometer/HTC-1	Temperature: -10 to 50°C Humidity: 25%Rh to 98%Rh	2021/8/17	2022/8/16
		TS-SB-11726/Cronometro/TF307	Time: 5 to 3600s	2021/8/17	2022/8/16
		TS-SB-12568/Digital multimeter /17B+	DC Voltage: 0 to 1000V DC Current: 0 to 10A	2021/11/16	2022/11/15
		TS-SB-12647/ Electronic balance/ FA2204H	Range: 0.01g to 200g Precision: 0.0001g	2021/8/17	2022/8/16
19	Low Pressure(Altitude Simulation) Test	TS-SB-06741/Vacuum Oven/T-VT-216	200Pa to 3000Pa	2021/8/17	2022/8/16
		TS-SB-07741/Digital temperature and hygrometer/HTC-1	Temperature: -10 to 50°C Humidity: 25%Rh to 98%Rh	2021/8/17	2022/8/16
		TS-SB-12568/Digital multimeter /17B+	DC Voltage: 0 to 1000V DC Current: 0 to 10A	2021/11/16	2022/11/15
		TS-SB-11726/Cronometro/TF307	Time: 5 to 3600s	2021/8/17	2022/8/16
		TS-SB-12647/ Electronic balance/ FA2204H	Range: 0.01g to 200g Precision: 0.0001g	2021/8/17	2022/8/16
20	Projectile	TS-SB-06740/Battery combustion tester/RJD-RS-6130	Diameter of round hole: 102 mm, Diameter of Wire mesh: 0.45mm 20 mesh/inch, Aluminum wire mesh: 0.25mm in diameter, 16 to 18 mesh/inch, Eight masks: the distance between the two parallel sides is 610 mm, and the height is 305mm, Angle iron: upper and lower width 12.7*12.7mm, Combustion time: 0 to 999.9s	2021/8/17	2022/8/16

		TS-SB-07740/Digital temperature and hygrometer/HTC-1	Temperature: -10 to 50°C Humidity: 25%Rh to 98%Rh	2021/8/17	2022/8/16
		TS-SB-12568/Digital multimeter /17B+	DC Voltage: 0 to 1000V DC Current: 0 to 10A	2021/11/16	2022/11/15

Product: Polymer Li-ion Cell

Type Designation: 104050

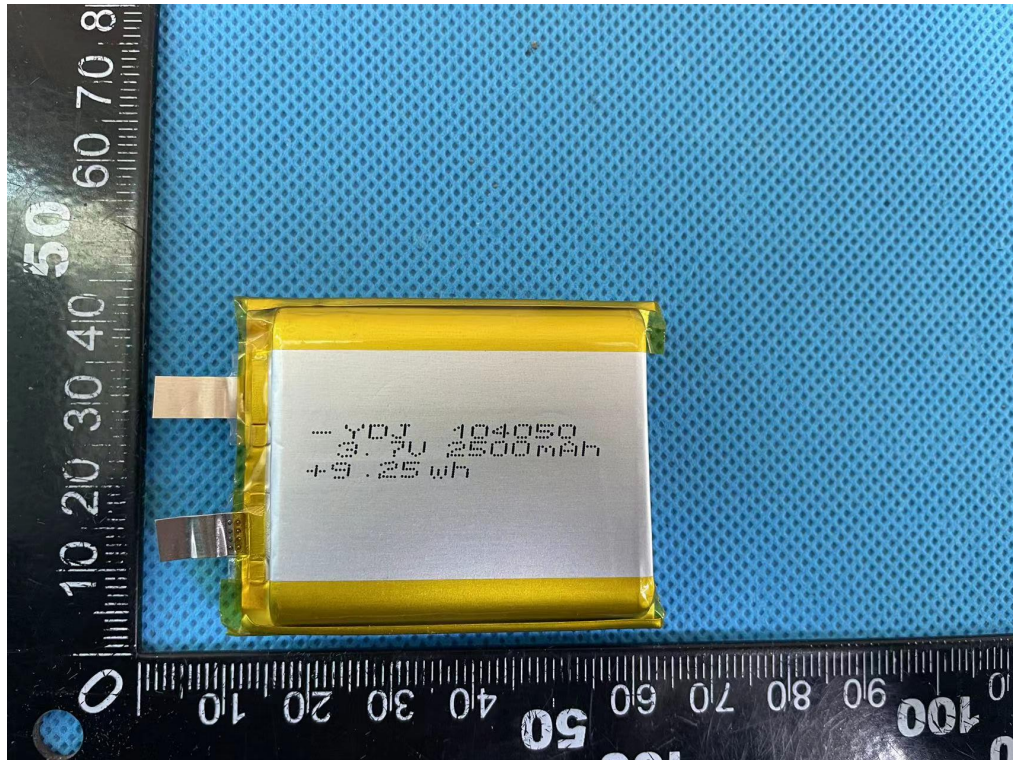


Figure 1. Front view of cell

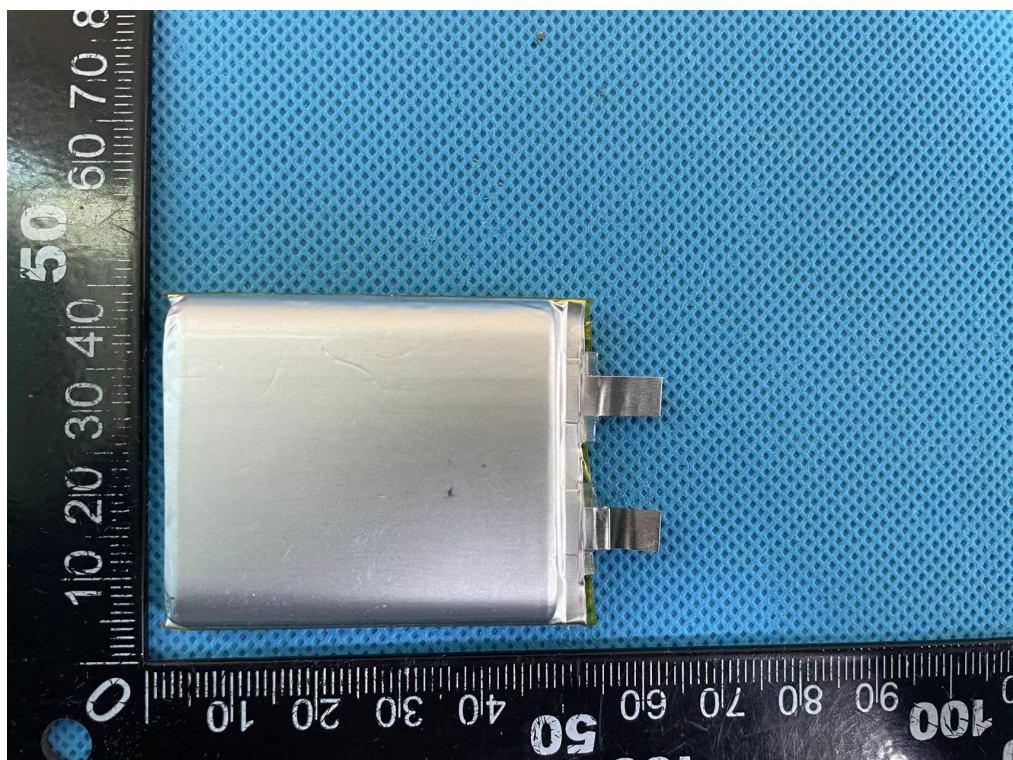


Figure 2. Back view of cell