



# FLARE

Coverage up to 2,500 ft<sup>2</sup>

Voice & 4G LTE

All Carriers

Auto Gain Control

## SureCall Flare<sup>®</sup>

Improving Cell Service for Homes up to 2,500 sq. ft.

### Overview

Get better cell signals for all US cell carriers inside any home, cabin, small building or office up to 2,500 square feet. Flare uses a powerful signal booster that delivers 2X more cell signal boosting power to connect homes and small buildings with reliable call, text, and 4G LTE data coverage.


This multi-award winning signal booster features a built-in indoor omni-directional antenna that increases signal strength for multiple simultaneous users. Flare is trusted by thousands of customers across the US for its huge boosting power in a compact, streamlined package.

- Improves cell service for all US carrier's voice, text and 4G LTE data signals
- Increases signal strength for multiple users on all cellular devices, up to 2,500 sq ft
- Now with 2X more uplink power to reach faraway and hard to reach cell towers
- Omni-directional outdoor antenna captures signal from all directions
- Simple to set up with all components included for a light DIY install
- Industry best 3-year warranty and lifetime US-based tech support

### Package Contents

Flare indoor booster, omni-directional outdoor antenna, RG-6 coax cable (50 ft) and AC power supply

### Installation Example

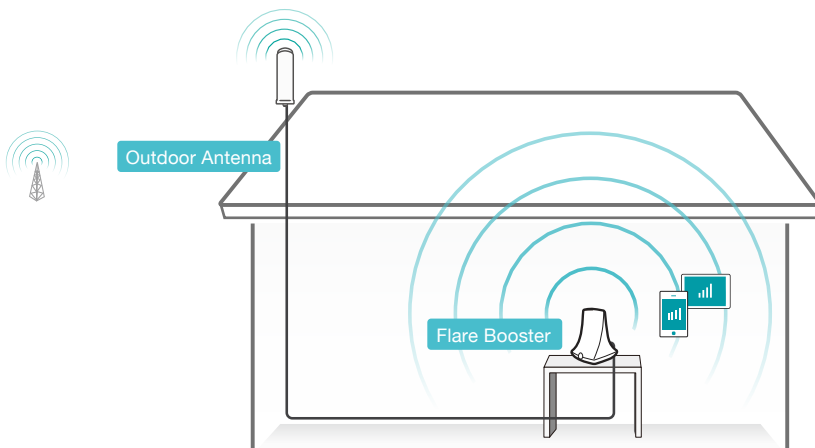

The SureCall Flare signal booster

### Specifications

Uplink Frequency Ranges (MHz):	698-716 / 776-787 / 824-849 / 1710-1755 / 1850-1915
Downlink Frequency Ranges (MHz):	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
Max Gain:	72 dB
Impedance:	75Ω in / 50Ω out
Max Uplink Power:	26.0 dBm
Cable:	RG6 (50 ft.)
RF Connectors:	F Female
FCC ID:	RSNFLARE-3

► Patent No. US 8,867,572 B1; US 9,100,839 B2



48346 Milmont Dr.  
Fremont, CA 94538  
www.SureCall.com

info@surecall.com  
888-365-6283

Flare (PART: SC-Poly-DT-O-Kit; UPC: 858507006403)