Features:

- Compact and Powerful Mini Amp System
- Built-in BT for Wireless Audio Streaming
- 1/4" Microphone Input Connector Jack
- Aux (3.5mm) iPod/MP3 Input Connector Jack
- RCA (L/R) Audio Input Connector Jacks
- Four Push Type Speaker Terminals
- Rotary Treble, Bass, Master Volume Adjustable Controls
- Electronic Short, Overload & Overheat Protection
- Audio Source Input Selection
- Includes Power Adapter

Wireless BT Connectivity:

- Built-in Wireless BT Audio Receiver
- Simple Pairing for Wireless Music Streaming
- Works with All of Today's Latest Wireless BT Devices (Smartphones, Tablets, Laptops, computers, etc.)
- Wireless BT Version: 5.0
- Wireless BT Network Name: 'PYLEUSA'
- Wireless Range: Up to 40' ft.

Technical Specs:

- Max Power Output: 90 Watt Output
- RMS Power Output: 10 Watt x 2 @ 4 Ohm
- RMS Power Output: 10 Watt x 2 @ 8 Ohm
- Max Power Output: 15 Watt x 2 @ 8 Ohm
- Frequency Response: 20Hz-20 kHz
- Speaker Impedance: 4-8Ω
- Class-T Circuit Design
- Rate Level Mic Input: $8mv/600 \Omega$
- Tone Control (Bass): +/- 8dB
- Tone Control (Treble): +/- 8dB
- Signal to Noise Ratio: >80dB
- Total Harmonic Distortion: <0.4%
- Input Power: DC 9 ~ 14.4V, 2A
- 12V AC/DC Power Adapter
- Dimensions (L x W x H): 6.0" x 4.6" x 1.6" -inches





PFA330BT

Wireless BT Mini Blue Compact Audio Amplifier


Aux (3.5mm) Input, Push-Type Speaker Terminals, Includes Power Adapter, 90 Watt Amp

USER MANUAL


WIRELESS BT OPERATION INSTRUCTION:

External devices which have a built-in Wireless BT feature can be connected to this amplifier wirelessly to play through the amplifier's speakers. If your amp is connected to speakers, you will hear audible tones which will help for connecting.

- **1.** At first be sure that the amplifier is powered on, and turn the volume to low. Please remember to connect the Wireless BT Antenna at the back panel for better receiving signal.
- **2.** Press "BT WIRELESS/AUX/MP3" button on the front panel, the unit is automatically ready to pair with your devices when the Wireless BT indicator light is on.
- 3. Turn on the Wireless BT of your external device.
- **4.** Search for available Bluetooth devices and make sure to be within range of your amp, and wait for your device to select "PYLE SPEAKER" on the pairing devices lists of Wireless BT networks.
- **5.** Your amplifier will beep and the lights will flash once when pairing is successful.
- **6.** You can now play music on your external device through the amplifier.

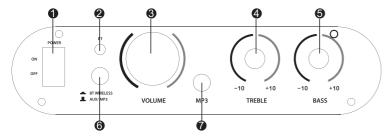

- 1. POWER ON/OFF
- 2. Wireless BT Indicator
- 3. Master Volume Control
- **4/5.** Bass And Treble Tone Control
- 6. Wireless BT/ AUX-MP3 Input Button Switch
- 7. LineAUX/MP3 Input

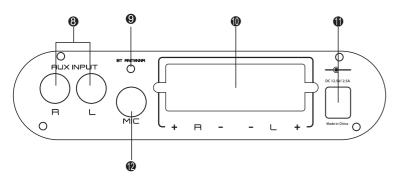

- 8. Aux RCA Stereo Input
- 9. Wireless BT Antenna

- **11.** DC 12V Input
- **12.** 1/4" MIC Input Jack
- 10. Push Type Speaker L/R Terminals

This multipurpose digital Hi-Fi audio amplifier packs a punch. It can be used in your car or home. Don't be fooled by the size, it'll give your entertainment system a serious boost. The state of the art design uses surface mount components and advanced engineering for proven performance, reduced signal interference, and long operational life. This unit will ensure low distortion and acoustically accurate reproduction of audio. The **PFA330BT**, 90-watt class-T circuit designed amp will turn it up to the next level.

Plug it In

Connect your iPod/MP3 player to the 3.5mm input jack. This unit also has microphone and audio input jacks. (iPod & MIC not included)

Party Machine

Create a Karaoke session and let the fun begin. Use the MIC and aux inputs to add life to the party. You will be in control of the music and then you can configure the audio just the way you want it to sound.

The amplifier use a Class-T audio amplifier IC for low distortion and acoustically accurate reproduction of music. Wireless BT music streaming ability that works virtually with any Wireless BT compatible devices like iPhone, Android, Smartphones, Tablet, MP3 players, TV, PC, etc. Over-voltage protection circuit shuts down the amplifier if input voltage exceeds 14.4V DC.

Ouestions? Issues?

We are here to help!
Phone: (1) 718-535-1800

Email: support@pyleusa.com



This product can expose you to a chemical or group of chemicals, which may include "Nickel Carbonate" which is known in the state of California to cause cancer, birth defects, or other reproductive harm. For more info, go to https://www.p65warnings.ca.gov/.

2 www.PyleUSA.com www.PyleUSA.com 3