


Spurr-Vent® Louvered Dryer Vent Hood

With Pipe & Collar

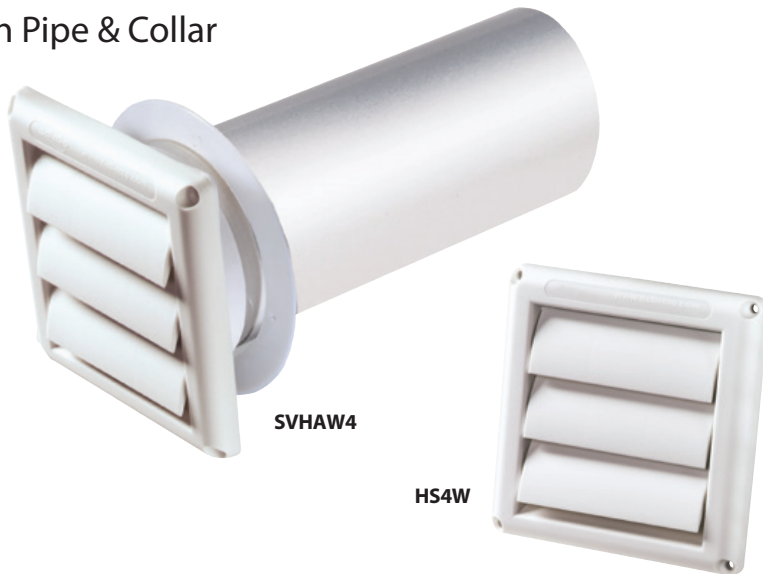

MODEL NO.	DESCRIPTION
-----------	-------------

HS4W	Louvered hood only, white
HS4B	Louvered hood only, brown
SVHAW4	Louvered hood and pipe, assembled, white
SVHAB4	Louvered hood and pipe, assembled, brown

GENERAL INFORMATION

- 4" (10.2 cm) diameter opening
- Quick, easy installation
- Louvered construction helps prevent wind and rain from entering vent
- Opens with ease for maximum airflow
- Durable, weather resistant
- Curved louvers for quieter operation

PERFORMANCE DATA

For all plastic molded louvered vent hoods

Hood

- Calcium filled polypropylene
- Melting point: 325°F+
- UV inhibitor added

Pipe

- Aluminum

Collar

- High impact styrene

TECHNICAL DATA

Hood Dia.	CFM	Tested	p/d in/w.c.
4" (10.2 cm)	50	Yes	.045
4" (10.2 cm)	75	Yes	.056
4" (10.2 cm)	100	Yes	.052
4" (10.2 cm)	125	Yes	.043
4" (10.2 cm)	150	Yes	.042
4" (10.2 cm)	175	Yes	.04
4" (10.2 cm)	200	Yes	.032

